

SPECTITE

from TC Ltd

Pressure and Vacuum Sealed Feedthroughs for Sensors, Probes, Electrodes and Wires



Spectite® Sealed Feedthroughs for Pressure and Vacuum Applications

Spectite® Sealed Feedthroughs sometimes called sealing glands, are used to seal elements under the most arduous conditions and have many applications in a wide variety of industries:

- **Process plant**
- **Power generation**
- **Vacuum equipment**
- **Petro-chem**
- **Pharmaceutical**
- **Glass production**
- **Semiconductor fabrication**
- **Energy distribution**



They inhibit the leakage of gases or other media and restrain the elements from moving in the assembly because of differential pressure. In some assemblies, elements are also electrically isolated from the feedthrough body and from each other.

The feedthroughs are made from stainless steel and are designed for mounting on to a process vessel or enclosure. Versions can be specified to seal on both single and multiple elements of different types and sizes.



The cap nut is tightened to a pre-set torque to compress an internal sealant. The sealant provides an efficient pressure seal on the elements without damaging them. At the same time it restrains them from moving. Epoxy sealing is not used.

Details of the complete range of Spectite® feedthrough assemblies can be found in this catalogue and on our website.

Contents

	Page
	4
Series PF for single probes, sensors, tubes and other similar elements.	
	8
Series PSF as Series PF but with split internal components.	
	12
Series MF for multiple probes, sensors, tubes and other similar elements.	
	16
Series MSF and MSFD as Series MF but with split internal components.	
	24
Series WF for multiple, bare or insulated wires and small diameter sensors.	
	30
Series HF high density, insulated wire, sealed tubes for mounting in Spectite® feedthroughs.	
	32
Series BSF for bearing applications.	
	36
Series ASF for Autoclave applications.	
	40
Series EF, EFT and EFP with integral high voltage / current electrodes.	
Accessories Replacement sealants, parts and accessories, reducers and adaptors.	52
General Specifications and Selection Guide	54

Series PF Feedthroughs for Single Elements

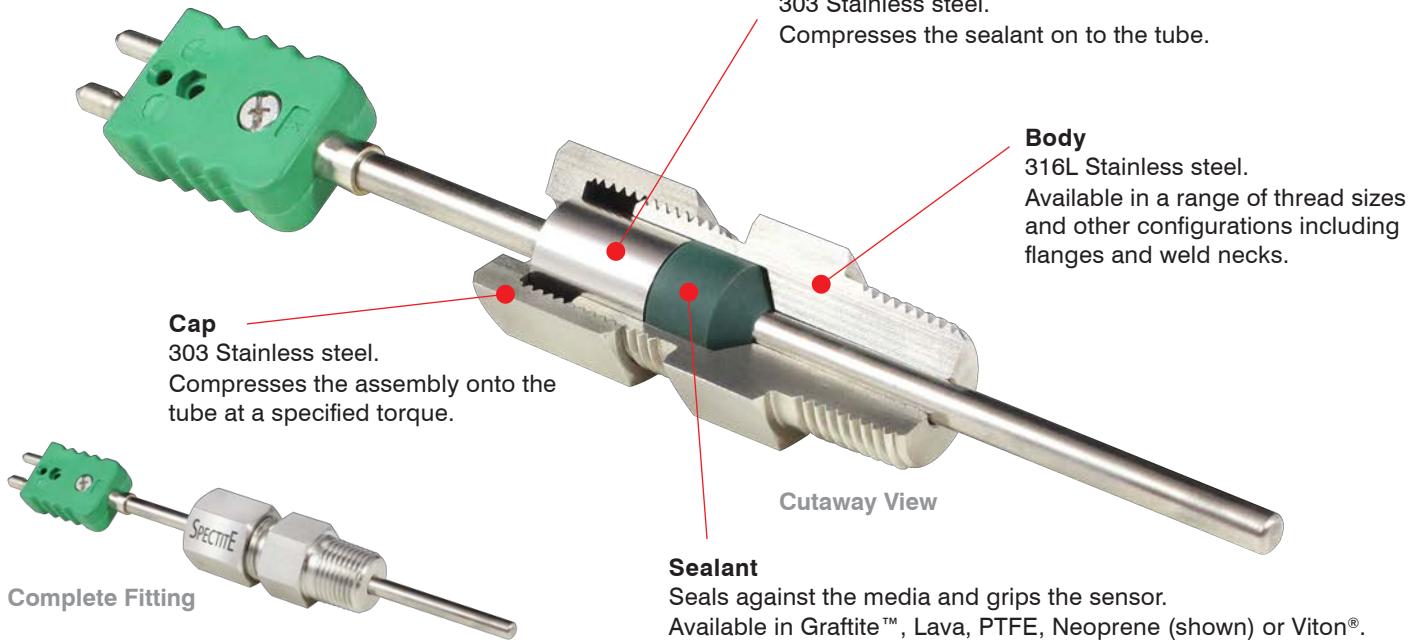
These feedthroughs are designed for sealing single elements, usually sensors, probes or tubes, where they penetrate a pressure or environmental boundary.

Common applications include sealing sheathed thermocouples and resistance thermometers, small-bore tubes and other types of sensor where they enter a process enclosure.

Series PF feedthroughs seal elements from 0.5mm Ø to 25.4mm Ø. There are six body sizes (0 to 5) having 1/16", 1/8", 1/4", 1/2", 3/4" and 1" process connections with BSPT (conical gas or DIN 2999 'R') and NPT threads along with ISO, SAE and UNF threads as shown in section 3.

Spectite® feedthroughs are designed for ease of assembly and installation. Elements can be adjusted, removed and replaced when not under pressure or vacuum conditions.

Typical Construction



- Seal on probes, sensors, small-bore tubes and other similar elements
- Immersion length of the element can be easily adjusted as required
- Six sizes of feedthrough assembly
- Designed for easy installation of single elements 0.5mm to 25.4mm diameter

- Guide pressure range: Vacuum up to 700 bar
- Temperature range: -200°C to +870°C
- 316L Stainless steel wetted parts (see image above)
- Choice of five sealant materials
- Reusable fitting (dependant on sealant)
- Reusable and replaceable internal components - see page 52

Alternative Configurations



ATEX / IECEx approved versions available, please contact us for more details

Section 1 - Series PF Sealants

Sealant Material	Code	Colour	Example	Operating Temperature Range	Re-usable	Material definition and properties
Neoprene	N	Green		-40°C to +90°C	✓	Synthetic rubber based on polychloroprene. The elastic properties of the polymer are enhanced by vulcanization. It is much more resistant to heat, light, oxidation, and petroleum than ordinary rubber.
Viton®	V	Brown		-40°C to +225°C (intermittently to +285°C)	✓	Fluoroelastomer. Resists hydrocarbons, corrosive chemicals and petroleum. Solvent, acid and base resistant. Low permeation rate. Mechanically robust at high temperatures.
PTFE	T	White		-200°C to +250°C	✓	Polytetrafluoroethylene. FDA approved grade to Title 21-CFR 17. 1550 and is approved to US Pharmacopoeia Class VI. Has smooth, non-wetting, hydrophobic surfaces that resist biofilm buildup and the lowest coefficient of friction of any solid material. Low thermal transfer.
Graffite™	G	Grey / Black		-200°C to +550°C (to +870°C in a reducing atmosphere)	✗	Graphite 98% purity. Impermeable to gases and liquids. Resistant to most media, not 'wetted' by molten metals or salts. Asbestos-free. No ageing or embrittlement. Good resistance to thermal shock. Conductive material (not electrically isolated).
Lava	L	Grey Stone		-200°C to +870°C	✗	Natural Magnesium Silicate (Soapstone, Steatite or Rock Talc). Crushes to a powder when compressed. Hygroscopic. Porous to light gases. Unsuitable for use with liquid media and in most vacuum applications.

Other sealant materials may be specified, usually for the individual special requirements of particular applications. Please contact TC Ltd. for assistance.

Section 2 - Series PF Body Size, Pressure Guide¹ and available Bore Sizes for BSPT, BSPP and NPT Threads²

Body Size		Size 0 (1/16")			Size 1 (1/8")					Size 2 (1/4")					Size 3 (1/2")					Size 4 (3/4")					Size 5 (1")				
Sealant		G	L	T	G	L	N	T	V	G	L	N	T	V	G	L	N	T	V	G	L	T	V	G	L	T	V		
Element Sizes (dia) ³		The maximum guide pressure value (in bar) at 20°C is shown for each sealant material according to element size ¹ . These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.																											
inches	mm	0.020	0.5																										
0.032	0.8			550	200	450	550	350	200	350																			
0.040	1.0			650	150			150	150	500	550																		
0.059	1.5																												
0.062	1.59																												
0.080	2.0																												
0.118	3.0																												
0.125	3.2																												
0.157	4.0																												
0.177	4.5																												
0.187	4.76																												
0.236	6.0																												
0.250	6.35																												
0.312	8.0																												
0.375	9.5																												
0.393	10.0																												
0.472	12.0																												
0.500	12.7																												
0.625	15.88																												
0.750	19.05																												
0.839	21.3																												
1.00	25.4																												

¹ The guide pressures shown for each type of sealant are at 20°C. Spectite® feedthroughs from TC Ltd. have been designed to provide an efficient seal on the elements and restrain them from moving under pressure and vacuum. It is good installation practice to provide additional, mechanical restraint to the elements when differential pressure exceeds 50% of the feedthrough guide pressure value at 20°C. With an increase in temperature, a reduction in the maximum guide pressure value can be expected. These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.


² Other types of process connection are available, see Section 3.

³ The element diameters shown are the common sizes routinely demanded for general industrial applications. Other sizes can be supplied between the minimum and maximum diameters shown.


Section 3 - Series PF Body Size and available Bore Sizes for all Thread Types - please refer to table for guide pressures in Section 2

Size 0 (1/16" Thread or equivalent)	
Standard Thread Sizes	Max. Tube Size
1/16" BSPT, 1/16" BSPP, 1/16" NPT	3.2mm
Alternative Thread Sizes	Max. Tube Size
M4x0.7, 1/4" SAE-20, 1/4" UNF-28	2.0mm
M5x0.8	2.0mm
M6x1.0	3.0mm


Standard Fitting




Fitting with Threaded Cap



Fitting with Weld Neck




Fitting with Weld Neck and Threaded Cap



Size 1 (1/8" Thread or equivalent)	
Standard Thread Sizes	Max. Tube Size
1/8" BSPT, 1/8" BSPP, 1/8" NPT	4.76mm
Alternative Thread Sizes	Max. Tube Size
M8x1.0, 3/8" UNF-24	4.76mm
M10x1.0, 7/16" UNF-24	4.76mm


Standard Fitting




Fitting with Threaded Cap



Fitting with Weld Neck




Fitting with Weld Neck and Threaded Cap




Size 2 (1/4" Thread or equivalent)	
Standard Thread Sizes	Max. Tube Size
1/4" BSPT, 1/4" BSPP, 1/4" NPT	6.35mm
Alternative Thread Sizes	Max. Tube Size
M10x1.0, 7/16" UNF-20	6.35mm
M12x1.5, 1/2" UNF-20	6.35mm


Standard Fitting




Fitting with Threaded Cap



Fitting with Weld Neck




Fitting with Weld Neck and Threaded Cap




Size 3 (1/2" Thread or equivalent)	
Standard Thread Sizes	Max. Tube Size
1/2" BSPT, 1/2" BSPP, 1/2" NPT	10.0mm
Alternative Thread Sizes	Max. Tube Size
3/8" BSPT, 3/8" BSPP, 3/8" NPT	10.0mm
M14x1.5, 7/16" SAE-20, 9/16" UNF-18	10.0mm
M16x1.5, 1/2" SAE-20, 5/8" UNF-18	10.0mm
M20x1.5, 9/16" SAE-24, 3/4" UNF-16	10.0mm

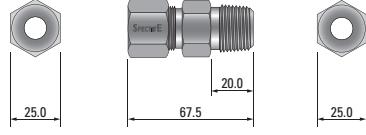
Standard Fitting




Fitting with Threaded Cap

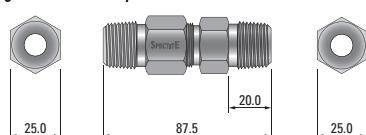

Fitting with Weld Neck

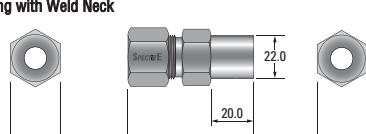


Fitting with Weld Neck and Threaded Cap

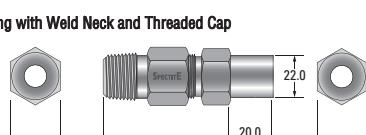


Size 4 (3/4" Thread or equivalent)	
Standard Thread Sizes	Max. Tube Size
3/4" BSPT, 3/4" BSPP, 3/4" NPT	19.05mm
Alternative Thread Sizes	Max. Tube Size
M22x1.5, 3/4" SAE-16, 7/8" UNF-14	19.05mm
M24x2.0, 7/8" SAE-14, 1" UNF-14	19.05mm

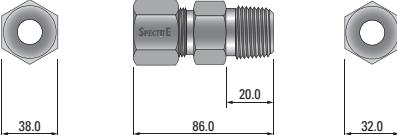
Standard Fitting




Fitting with Threaded Cap

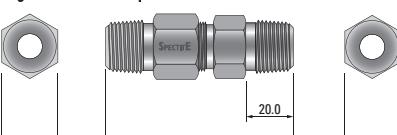

Fitting with Weld Neck

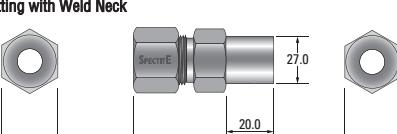


Fitting with Weld Neck and Threaded Cap

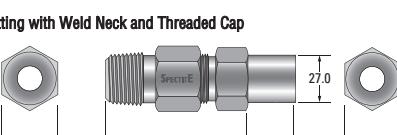


Size 5 (1" Thread or equivalent)	
Standard Thread Sizes	Max. Tube Size
1" BSPT, 1" BSPP, 1" NPT	25.4mm
Alternative Thread Sizes	Max. Tube Size
M27x2.0, 1+3/16" SAE-12, 1" UNF-14	25.4mm
M33x2.0, 1+5/8" SAE-12, 1+1/8" UNF-14	25.4mm

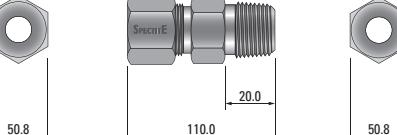
Standard Fitting




Fitting with Threaded Cap

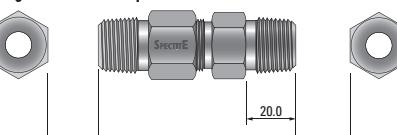

Fitting with Weld Neck

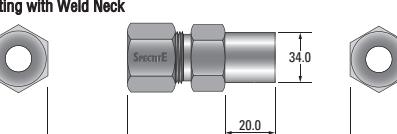


Fitting with Weld Neck and Threaded Cap

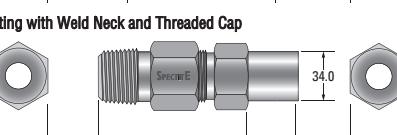

Please note: The overall length will vary slightly depending on the sealant used and the tube size.

Section 4 - Series PF Cap Configuration

Style A	Description	Style B	Description
	Standard Fitting with single thread for direct mounting into process.		<p>Standard Fitting with a Style B threaded extension for conduit/terminal head or enclosure connection. The thread form is the same as the process thread unless otherwise specified.</p> <p>If a different thread form is required, please specify after the 'B' in the order code, for example: PF1 - 1/8" BSPP - 1.5 - G - B NPT</p> <p>If a B cap is used with a weld neck fitting, then the thread form must be specified.</p>

Section 5 - Series PF - Optional Flange Details

Style	Example	Part Code	Maximum Compatible Body Size	Outside Diameter	Thickness
KF FLANGE		KF16	Size 2	30mm	5.08mm
		KF25	Size 3	40mm	5.08mm
		KF40	Size 5	55mm	5.08mm
		KF50	Size 5	75mm	5.08mm
CF FLANGE		DN16CF	Size 3	33.8mm	7.6mm
		DN25CF	Size 4	54.0mm	11.9mm
		DN35-40CF	Size 5	69.9mm	12.7mm
		DN50CF	Size 5	85.7mm	16.0mm
		DN63CF	Size 5	114.3mm	17.3mm

All flanges are supplied in 304L stainless steel as standard. Hygienic and Food Grade Flanges are also available - please contact us for further details.

CF Flanges are non-rotatable (fixed) type and comply with ISO3669-2017.


KF Flanges are compatible to the ISO Standard 2861 Specification.

Many other styles of flange available on request (DIN, JIS, ANSI, etc.), contact TC Ltd. for details

Series PF Torque Settings - Max. values in Nm

Process Connection Size	Sealants				
	G	L	N	T	V
Size 0 (1/16")	20	18	-	3	-
Size 1 (1/8")	20	18	15	12	15
Size 2 (1/4")	60	60	50	30	50
Size 3 (1/2")	135	190	85	75	85
Size 4 (3/4")	260	300	-	120	85
Size 5 (1")	300	350	-	400	300

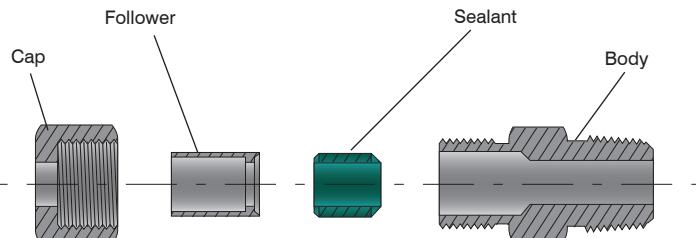Series PF Schematic



Typical components shown for a PF Series fitting.

Series PF - Order Code Examples

Feedthrough Series	Feedthrough Size (see Section 3)	Process Connection (see Section 3)	Element Diameter (see Section 2)	Sealant (see Section 1)	Cap Configuration (see Section 4)	Flange Details (only available with a weld neck)
PF	1	- 1/8" BSPT	- 3.0	- V	- A	
PF	2	- 1/4" NPT	- 1.5	- G	- B	
PF	3	- M16x1.5	- 6.0	- T	- A	
PF	4	- WELD	- 10.0	- L	- A	- KF50

Series PSF Split Feedthroughs for Single Elements

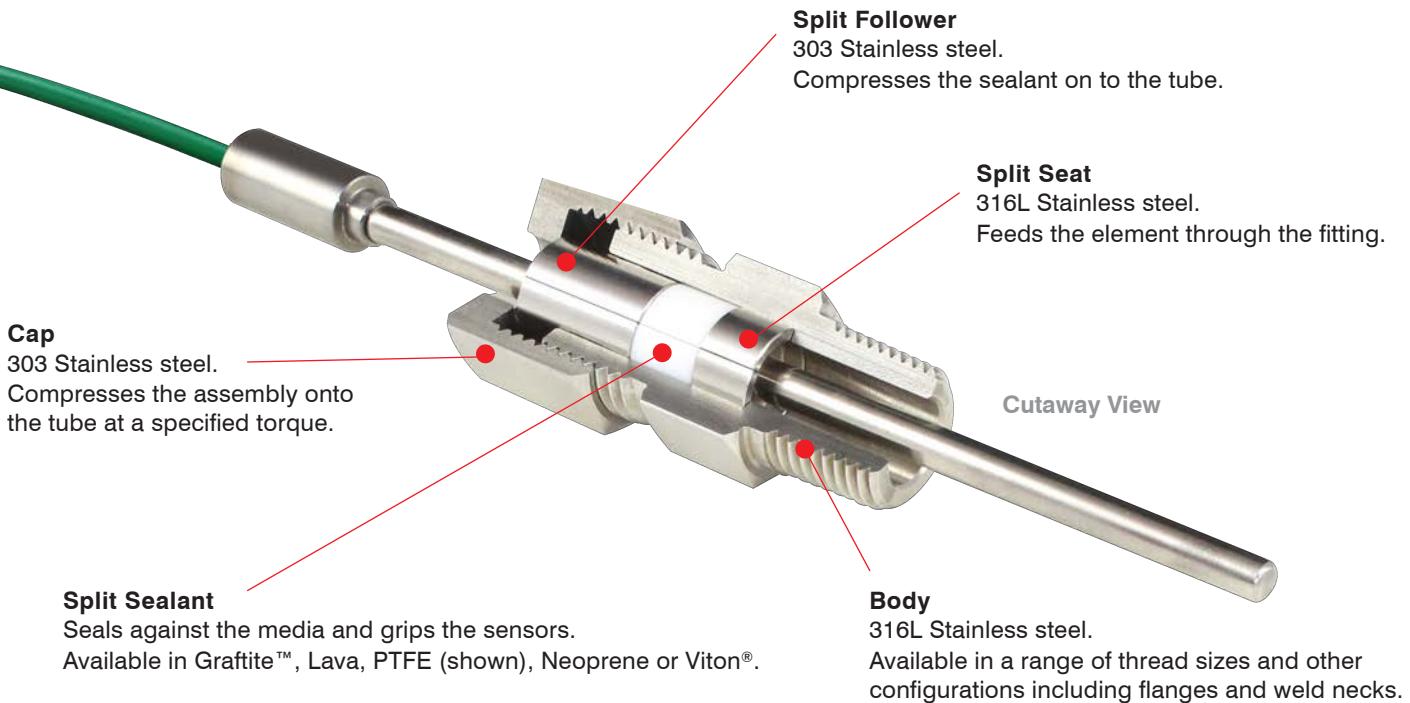
Series PSF are similar to series PF feedthroughs, but have split internal components.

This permits components larger than the element being sealed to be passed through the gland body during installation. Examples are probes with fitted connectors and sensors with bulbous tips.

There are four body sizes having 1/4", 1/2", 3/4" and 1" process connections in either BSPT (conical gas or DIN 2999 'R') and NPT threads.

Spectite® feedthroughs are designed for ease of assembly and installation. Elements can be adjusted, removed and replaced when not under pressure or vacuum conditions.

Typical Construction



- Individual elements can be easily replaced without the complete disassembly of the fitting
- Internal components – follower, sealant and seat are split to allow easy installation of elements with fitted connectors or large diameter sections
- Designed for easy installation of single elements 1.0mm to 19.05mm diameters
- Guide pressure range: Vacuum up to 670 bar
- Temperature range: -200°C to +870°C
- 316L Stainless steel wetted parts (see above)
- Choice of sealant materials
- Immersion length of each element easily adjusted
- Reusable fitting – internal components replaceable - see page 52

Alternative Configurations



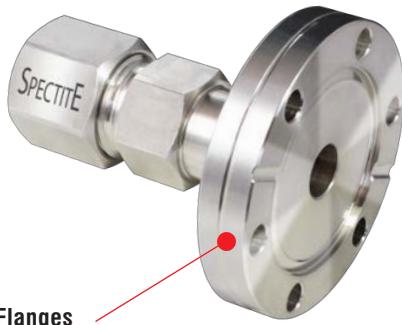
Threaded Extension (B Cap)

Allows the gland to be terminated into the process as well as to a terminal head or conduit at the opposite end to the process. See section 4 for details.



Weld Neck

Supplied without thread for permanent installation into the process by welding. Specify as 'WELD' for the thread size in the order code.



Flanges

For termination to a mating flange within the process, see section 5 for details of the flanges available as standard.

Section 1 - Series PSF Sealants

Sealant Material	Code	Colour	Example	Operating Temperature Range	Re-usable	Material definition and properties
Neoprene	N	Green		-40°C to +90°C	✓	Synthetic rubber based on polychloroprene. The elastic properties of the polymer are enhanced by vulcanization. It is much more resistant to heat, light, oxidation, and petroleum than ordinary rubber.
Viton®	V	Brown		-40°C to +225°C (intermittently to +285°C)	✓	Fluoroelastomer. Resists hydrocarbons, corrosive chemicals and petroleum. Solvent, acid and base resistant. Low permeation rate. Mechanically robust at high temperatures.
PTFE	T	White		-200°C to +250°C	✓	Polytetrafluoroethylene. FDA approved grade to Title 21-CFR 17. 1550 and is approved to US Pharmacopoeia Class VI. Has smooth, non-wetting, hydrophobic surfaces that resist biofilm buildup and the lowest coefficient of friction of any solid material. Low thermal transfer.
Graffite™	G	Grey / Black		-200°C to +550°C (to +870°C in a reducing atmosphere)	✗	Graphite 98% purity. Impermeable to gases and liquids. Resistant to most media, not 'wetted' by molten metals or salts. Asbestos-free. No ageing or embrittlement. Good resistance to thermal shock. Conductive material (not electrically isolated).
Lava	L	Grey Stone		-200°C to +870°C	✗	Natural Magnesium Silicate (Soapstone, Steatite or Rock Talc). Crushes to a powder when compressed. Hygroscopic. Porous to light gases. Unsuitable for use with liquid media and in most vacuum applications.

Other sealant materials may be specified, usually for the individual special requirements of particular applications. Please contact TC Ltd. for assistance.

Section 2 - Series PSF Body Size, Pressure Guide¹ and available Bore Sizes for BSPT, BSPP and NPT Threads²

Body Size		Size 2 (1/4")					Size 3 (1/2")					Size 4 (3/4")					Size 5 (1")				
Sealant		G	L	N	T	V	G	L	N	T	V	G	L	T	V	G	L	T	V		
Element Sizes (dia) ³		The maximum guide pressure value (in bar) at 20°C is shown for each sealant material according to element size ¹ . These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.																			
inches	mm	0.040	1.0				480	480	300	210	450										
		0.059	1.5																		
		0.062	1.59																		
		0.080	2.0																		
		0.118	3.0				480	610	180	80	180										
		0.125	3.2																		
		0.157	4.0																		
		0.177	4.5				260	590	100	50	150										
		0.187	4.76																		
		0.236	6.0																		
		0.250	6.35				230	500	80	40	120										
		0.312	8.0																		
		0.375	9.5																		
		0.393	10.0																		
		0.472	12.0																		
		0.500	12.7																		
		0.625	15.88																		
		0.750	19.05																		

¹ The guide pressures shown for each type of sealant are at 20°C. Spectite® feedthroughs from TC Ltd. have been designed to provide an efficient seal on the elements and restrain them from moving under pressure and vacuum. It is good installation practice to provide additional, mechanical restraint to the elements when differential pressure exceeds 50% of the feedthrough guide pressure value at 20°C. With an increase in temperature, a reduction in the maximum guide pressure value can be expected. These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.

² Other types of process connection are available, see Section 3.

³ The element diameters shown are the common sizes routinely demanded for general industrial applications. Other sizes can be supplied between the minimum and maximum diameters shown.

Section 3 - Series PSF Body Size and available Bore Sizes for all Thread Types - please refer to table for guide pressures in Section 2

Size 2 (1/4" Thread or equivalent)	
Standard Thread Sizes	Max. Tube Size
1/4" BSPT, 1/4" BSPP, 1/4" NPT	6.35mm
Alternative Thread Sizes	Max. Tube Size
M10x1.0, 7/16" UNF-20	6.35mm
M12x1.5, 1/2" UNF-20	6.35mm

Standard Fitting

Fitting with Threaded Cap

Fitting with Weld Neck

Fitting with Weld Neck and Threaded Cap

Size 3 (1/2" Thread or equivalent)	
Standard Thread Sizes	Max. Tube Size
1/2" BSPT, 1/2" BSPP, 1/2" NPT	10.0mm
Alternative Thread Sizes	Max. Tube Size
3/8" BSPT, 3/8" BSPP, 3/8" NPT	10.0mm
M14x1.5, 7/16" SAE-20, 9/16" UNF-18	10.0mm
M16x1.5, 1/2" SAE-20, 5/8" UNF-18	10.0mm
M20x1.5, 9/16" SAE-24, 3/4" UNF-16	10.0mm

Standard Fitting

Fitting with Threaded Cap

Fitting with Weld Neck

Fitting with Weld Neck and Threaded Cap

Size 4 (3/4" Thread or equivalent)	
Standard Thread Sizes	Max. Tube Size
3/4" BSPT, 3/4" BSPP, 3/4" NPT	19.05mm
Alternative Thread Sizes	Max. Tube Size
M22x1.5, 3/4" SAE-16, 7/8" UNF-14	19.05mm
M24x2.0, 7/8" SAE-14, 1" UNF-14	19.05mm

Standard Fitting

Fitting with Threaded Cap

Fitting with Weld Neck

Fitting with Weld Neck and Threaded Cap

Size 5 (1" Thread or equivalent)	
Standard Thread Sizes	Max. Tube Size
1" BSPT, 1" BSPP, 1" NPT	25.4mm
Alternative Thread Sizes	Max. Tube Size
M27x2.0, 1+3/16" SAE-12, 1" UNF-14	25.4mm
M33x2.0, 1+5/8" SAE-12, 1+1/8" UNF-14	25.4mm

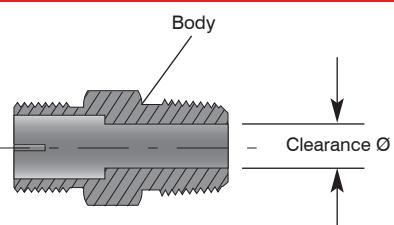
Standard Fitting

Fitting with Threaded Cap

Fitting with Weld Neck

Fitting with Weld Neck and Threaded Cap


Clearance Sizes for split internal components



Process Connection Size	Max. Clearance Size
Size 2 (1/4")	8.2mm Ø
Size 3 (1/2")	12.2mm Ø
Size 4 (3/4")	20.2mm Ø
Size 5 (1")	25.6mm Ø

Please note: The overall length will vary slightly depending on the sealant used and the tube size.

Section 4 - Series PSF Cap Configuration

Style A	Description	Style B	Description
	Standard Fitting with single thread for direct mounting into process.		Standard Fitting with a Style B threaded extension for conduit/terminal head or enclosure connection. The thread form is the same as the process thread unless otherwise specified. If a different thread form is required, please specify after the 'B' in the order code, for example: PSF2 - 1/4" BSPP - 1.5 - G - B NPT If a B cap is used with a weld neck fitting, then the thread form must be specified.

Section 5 - Series PSF - Optional Flange Details

Style	Example	Part Code	Maximum Compatible Body Size	Outside Diameter	Thickness
KF FLANGE		KF16	Size 2	30mm	5.08mm
		KF25	Size 3	40mm	5.08mm
		KF40	Size 5	55mm	5.08mm
		KF50	Size 5	75mm	5.08mm
CF FLANGE		DN16CF	Size 3	33.8mm	7.6mm
		DN25CF	Size 4	54.0mm	11.9mm
		DN35-40CF	Size 5	69.9mm	12.7mm
		DN50CF	Size 5	85.7mm	16.0mm
		DN63CF	Size 5	114.3mm	17.3mm

All flanges are supplied in 304L stainless steel as standard. Hygienic and Food Grade Flanges are also available - please contact us for further details.

CF Flanges are non-rotatable (fixed) type and comply with ISO3669-2017.

KF Flanges are compatible to the ISO Standard 2861 Specification.

Many other styles of flange available on request (DIN, JIS, ANSI, etc.), contact TC Ltd. for details


Series PSF Torque Settings - Max. values in Nm

Process Connection Size	Sealants				
	G	L	N	T	V
Size 2 (1/4")	50	60	40	35	40
Size 3 (1/2")	165	190	125	115	125
Size 4 (3/4")	260	300	-	150	175
Size 5 (1")	400	350	-	250	350

G = Graftite™, L = Lava, N = Neoprene, T = PTFE, V = Viton®

To convert: ft/lb = Nm x 0.738; Kg/cm = Nm x 10.2.

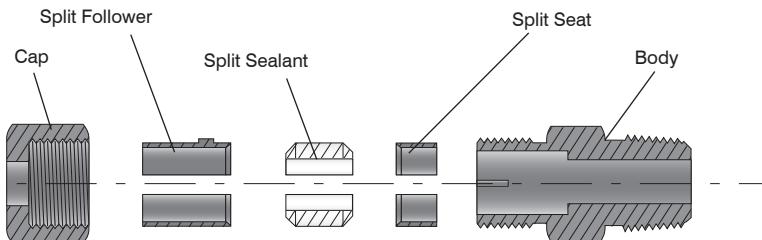Series PSF Schematic



Typical components shown for a PSF Series fitting.

Series PSF - Order Code Examples

Feedthrough Series	Feedthrough Size (see Section 3)	Process Connection (see Section 3)	Element Diameter (see Section 2)	Sealant (see Section 1)	Cap Configuration (see Section 4)	Flange Details (only available with a weld neck)
PSF	2	- 1/4" BSPT	- 3.0	- V	- A	
PSF	2	- 1/4" NPT	- 1.5	- G	- B	
PSF	3	- M16x1.5	- 6.0	- T	- A	
PSF	4	- WELD	- 10.0	- L	- A	- KF50

Series MF Feedthroughs for Multiple Elements

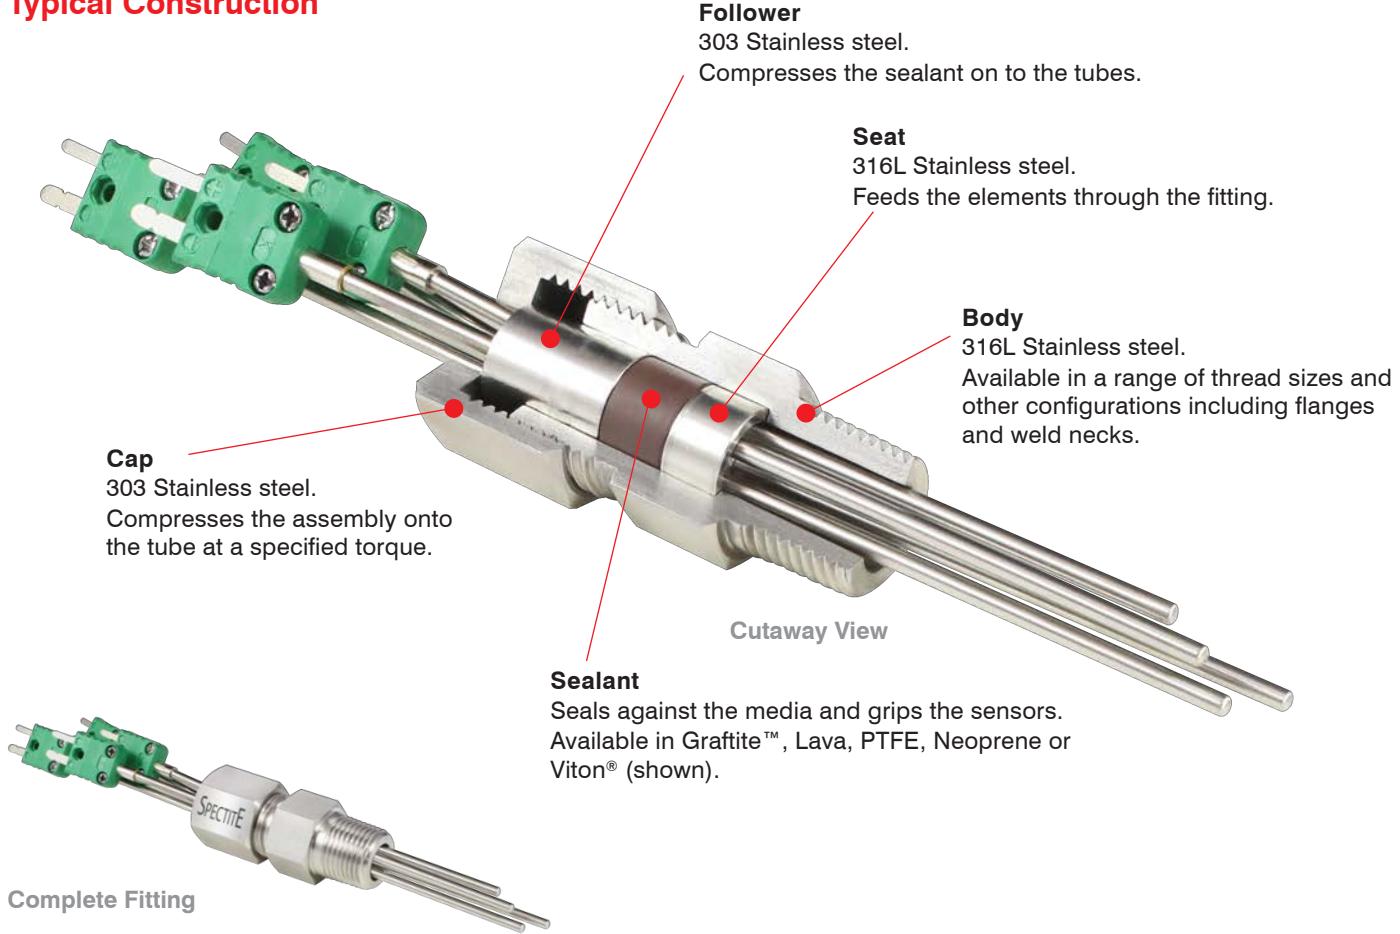
A single access port into an enclosure or process vessel is all that is needed to allow multiple probes, sensors, etc., to pass through an environmental or pressure boundary using a single feedthrough assembly.

Series MF feedthroughs can seal multiple elements within a single assembly including typically up to 40 x 1.0mm Ø, up to 12 x 3.0mm Ø or up to 4 x 6.0mm Ø elements. Please refer to the table for further details of feedthrough capacity and sizes of elements.

There are five body sizes having 1/8", 1/4", 1/2", 3/4" and 1" process connections in either BSPT (conical gas or DIN 2999 'R') and NPT threads.

Spectite® feedthroughs are designed for ease of assembly and installation. Elements can be adjusted, removed and replaced when not under pressure or vacuum conditions.

Typical Construction



- Saves time and costs by allowing multiple sensors to pass through one feedthrough fitting
- Immersion length of each element can be easily adjusted as required
- Five sizes of feedthrough assembly
- Designed for carrying multiple elements 0.5mm to 9.53mm diameter
- Suitable for a mixture of sizes and types of elements

- Guide pressure range: Vacuum up to 700 bar
- Temperature range: -200°C to +870°C
- 316L Stainless steel wetted parts (see above)
- Choice of five sealant materials
- Reusable fitting dependant on sealant
- Reusable and replaceable internal components – see page 52



ATEX / IECEx approved versions available, please contact us for more details

Alternative Configurations



Threaded Extension (B Cap)

Allows the gland to be terminated into the process as well as to a terminal head or conduit at the opposite end to the process. See section 4 for details.



Weld Neck

Supplied without thread for permanent installation into the process by welding. Specify as 'WELD' for the thread size in the order code.



Flanges

For termination to a mating flange within the process, see section 5 for details of the flanges available as standard.

Section 1 - Series MF Sealants

Sealant Material	Code	Colour	Example	Operating Temperature Range	Re-usable	Material definition and properties
Neoprene	N	Green		-40°C to +90°C	✓	Synthetic rubber based on polychloroprene. The elastic properties of the polymer are enhanced by vulcanization. It is much more resistant to heat, light, oxidation, and petroleum than ordinary rubber.
Viton®	V	Brown		-40°C to +225°C (intermittently to +285°C)	✓	Fluoroelastomer. Resists hydrocarbons, corrosive chemicals and petroleum. Solvent, acid and base resistant. Low permeation rate. Mechanically robust at high temperatures.
PTFE	T	White		-200°C to +250°C	✓	Polytetrafluoroethylene. FDA approved grade to Title 21-CFR 17. 1550 and is approved to US Pharmacopoeia Class VI. Has smooth, non-wetting, hydrophobic surfaces that resist biofilm buildup and the lowest coefficient of friction of any solid material. Low thermal transfer.
Graffite™	G	Grey / Black		-200°C to +550°C (to +870°C in a reducing atmosphere)	✗	Graphite 98% purity. Impermeable to gases and liquids. Resistant to most media, not 'wetted' by molten metals or salts. Asbestos-free. No ageing or embrittlement. Good resistance to thermal shock. Conductive material (not electrically isolated).
Lava	L	Grey Stone		-200°C to +870°C	✗	Natural Magnesium Silicate (Soapstone, Steatite or Rock Talc). Crushes to a powder when compressed. Hygroscopic. Porous to light gases. Unsuitable for use with liquid media and in most vacuum applications.

Other sealant materials may be specified, usually for the individual special requirements of particular applications. Please contact TC Ltd. for assistance.

Section 2 - Series MF Body Size, Pressure Guide¹ and available Bore Sizes for BSPT, BSPP and NPT Threads²

Body Size		Size 1 (1/8") ³					No. of Elements	Size 2 (1/4")					No. of Elements	Size 3 (1/2")					No. of Elements	Size 4 (3/4")					No. of Elements	Size 5 (1")					
Sealant		G	L	N	T	V		G	L	N	T	V		G	L	N	T	V		G	L	T	V	G	L	T	V				
<i>Element Sizes (dia)</i> The maximum guide pressure value (in bar) at 20°C is shown for each sealant material according to element size ¹ . These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.																															
inches	mm	0.020	0.5					300	400			250		4 to 16					8 to 40		300		400								
0.032	0.8	2 to 4	400	400	250	250	250	4 to 8		250	250			4 to 12	700	700	400	250	450	8 to 28	550		250	550	350	8 to 24	200	150	100	150	
0.040	1.0													2 to 4			350	200	350	4 to 12											
0.059	1.5																300	150	250	2 to 4											
0.062	1.59																			4 to 8											
0.080	2.0																			2 to 6											
0.118	3.0																			500	700	200	500								
0.125	3.2																			200	150	350	4 to 12								
0.177	4.5																			150	100	250	2 to 4								
0.187	4.76																						350	150	300	2 to 6					
0.236	6.0																								150	70	70	40			
0.250	6.35																														
0.315	8.0																														
0.375	9.53																														

¹ The guide pressures shown for each type of sealant are at 20°C. Spectite® feedthroughs from TC Ltd. have been designed to provide an efficient seal on the elements and restrain them from moving under pressure and vacuum. It is good installation practice to provide additional, mechanical restraint to the elements when differential pressure exceeds 50% of the feedthrough guide pressure value at 20°C. With an increase in temperature, a reduction in the maximum guide pressure value can be expected. These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.

² Other types of process connection are available, see Section 3.

³ Our Size 1 range utilises different internal parts.

Section 3 - Series MF Body Size and available Bore Sizes for all Thread Types - please refer to table for guide pressures in Section 2

Size 1 (1/8" Thread or equivalent)		
Standard Thread Sizes		
1/8" BSPT, 1/8" BSPP, 1/8" NPT		
Alternative Thread Sizes		
M8x1.0, 3/8" UNF-24		
M10x1.0, 7/16" UNF-24		
Standard Fitting		
Fitting with Threaded Cap		
Fitting with Weld Neck		
Fitting with Weld Neck and Threaded Cap		

Size 2 (1/4" Thread or equivalent)		
Standard Thread Sizes		
1/4" BSPT, 1/4" BSPP, 1/4" NPT		
Alternative Thread Sizes		
M12x1.5, 1/2" UNF-20		
M14x1.5, 7/16" UNF-18		
Standard Fitting		
Fitting with Threaded Cap		
Fitting with Weld Neck		
Fitting with Weld Neck and Threaded Cap		


Size 3 (1/2" Thread or equivalent)		
Standard Thread Sizes		
1/2" BSPT, 1/2" BSPP, 1/2" NPT		
Alternative Thread Sizes		
3/8" BSPT, 3/8" BSPP, 3/8" NPT		
M16x1.5, 1/2" SAE-20, 5/8" UNF-18		
M20x1.5, 9/16" SAE-24, 3/4" UNF-16		
Standard Fitting		
Fitting with Threaded Cap		
Fitting with Weld Neck		
Fitting with Weld Neck and Threaded Cap		

Size 4 (3/4" Thread or equivalent)		
Standard Thread Sizes		
3/4" BSPT, 3/4" BSPP, 3/4" NPT		
Alternative Thread Sizes		
M24x2.0, 7/8" SAE-14, 1" UNF-14		
Standard Fitting		
Fitting with Threaded Cap		
Fitting with Weld Neck		
Fitting with Weld Neck and Threaded Cap		

Size 5 (1" Thread or equivalent)		
Standard Thread Sizes		
1" BSPT, 1" BSPP, 1" NPT		
Alternative Thread Sizes		
M33x2.0, 1+5/8" SAE-12, 1+1/8" UNF-14		
Standard Fitting		
Fitting with Threaded Cap		
Fitting with Weld Neck		
Fitting with Weld Neck and Threaded Cap		

Please note: The overall length will vary slightly depending on the sealant used and the tube size.

Section 4 - Series MF Cap Configuration

Style A	Description	Style B	Description
	Standard Fitting with single thread for direct mounting into process.		<p>Standard Fitting with a Style B threaded extension for conduit/terminal head or enclosure connection. The thread form is the same as the process thread unless otherwise specified.</p> <p>If a different thread form is required, please specify after the 'B' in the order code, for example: MF3 – 1/2" BSPT – 1.5 – 8 – G – B NPT</p> <p>If a B cap is used with a weld neck fitting, then the thread form must be specified.</p>

Section 5 - Series MF - Optional Flange Details

Style	Example	Part Code	Maximum Compatible Body Size	Outside Diameter	Thickness
KF FLANGE		KF16	Size 2	30mm	5.08mm
		KF25	Size 3	40mm	5.08mm
		KF40	Size 5	55mm	5.08mm
		KF50	Size 5	75mm	5.08mm
CF FLANGE		DN16CF	Size 3	33.8mm	7.6mm
		DN25CF	Size 4	54.0mm	11.9mm
		DN35-40CF	Size 5	69.9mm	12.7mm
		DN50CF	Size 5	85.7mm	16.0mm
		DN63CF	Size 5	114.3mm	17.3mm

All flanges are supplied in 304L stainless steel as standard. Hygienic and Food Grade Flanges are also available - please contact us for further details.

CF Flanges are non-rotatable (fixed) type and comply with ISO3669-2017.

KF Flanges are compatible to the ISO Standard 2861 Specification.

Many other styles of flange available on request (DIN, JIS, ANSI, etc.), contact TC Ltd. for details


Series MF Torque Settings - Max. values in Nm

Process Connection Size	Sealants				
	G	L	N	T	V
Size 1 (1/8")	40	45	35	30	35
Size 2 (1/4")	50	60	40	35	40
Size 3 (1/2")	165	190	125	115	125
Size 4 (3/4")	260	300	—	150	175
Size 5 (1")	400	350	—	250	350

G = Grafite™, L = Lava, N = Neoprene, T = PTFE, V = Viton®

To convert: ft/lb = Nm x 0.738; Kg/cm = Nm x 10.2.

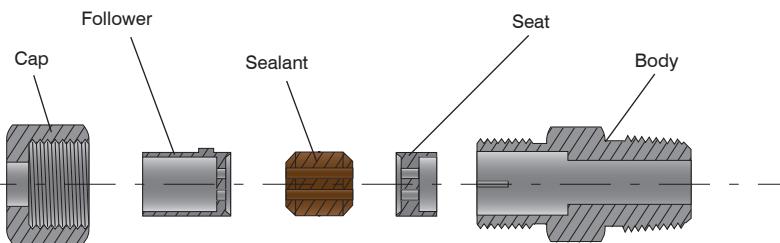Series MF Schematic



Typical components shown for an MF Series fitting. Size 1 fittings have slightly different components.

Series MF - Order Code Examples

Feedthrough Series	Feedthrough Size (see Section 3)	Process Connection (see Section 3)	Element Diameter (see Section 2)	No. of Elements (see Section 2)	Sealant (see Section 1)	Cap Configuration (see Section 4)	Flange Details (only available with a weld neck)
MF	1	– 1/8" BSPT	– 1.0	– 2	– V	– A	
MF	2	– 1/4" NPT	– 1.5	– 4	– T	– B	
MF	3	– 1/2" BSPT	– 3.2	– 2	– L	– A	
MF	4	– WELD	– 6.0	– 4	– G	– A	– KF50

Series MSF

Single Split Feedthroughs for Multiple Elements

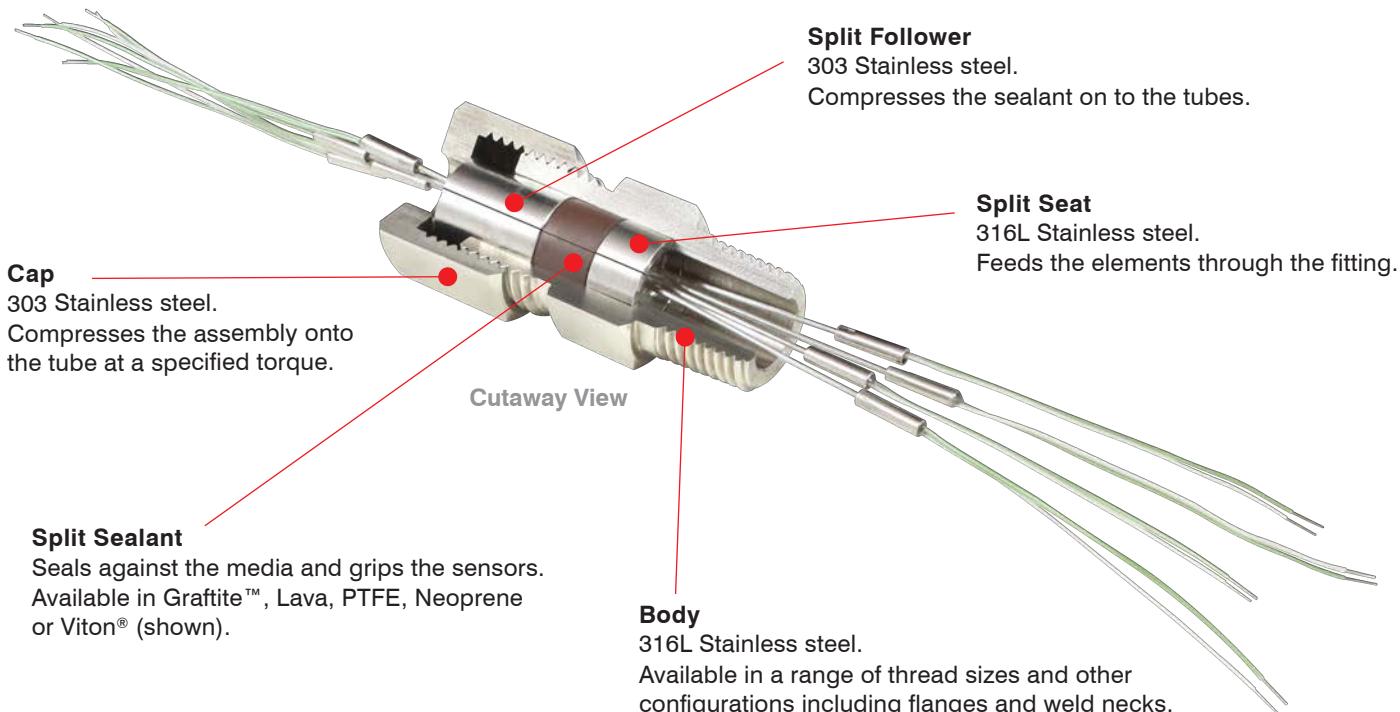
Series MSF feedthroughs are similar to Series MF feedthroughs, but have single split internal components.

This permits components larger than the element being sealed to be passed through the gland body during installation. Examples are probes with fitted connectors and sensors with pot seals or bulbs.

There are four body sizes having 1/4", 1/2", 3/4" and 1" process connections in either BSPT (conical gas or DIN 2999 'R') and NPT threads.

Spectite® feedthroughs are designed for ease of assembly and installation. Elements can be adjusted, removed and replaced when not under pressure or vacuum conditions.

Typical Construction



- Individual elements can be easily replaced without the complete disassembly of the fitting
- Internal components – follower, sealant and seat are split to allow easy installation of elements with fitted connectors or large diameter sections
- Designed for carrying multiple elements 1.0mm to 6.35mm diameter
- Guide pressure range: Vacuum up to 550 bar
- Temperature range: -200°C to +870°C
- 316L Stainless steel wetted parts (see above)
- Choice of sealant materials
- Immersion length of each element easily adjusted
- Reusable fitting – internal components replaceable - see page 52

Alternative Configurations



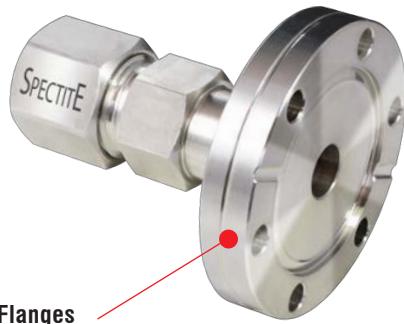
Threaded Extension (B Cap)

Allows the gland to be terminated into the process as well as to a terminal head or conduit at the opposite end to the process. See section 4 for details.



Weld Neck

Supplied without thread for permanent installation into the process by welding. Specify as 'WELD' for the thread size in the order code.



Flanges

For termination to a mating flange within the process, see section 5 for details of the flanges available as standard.

Section 1 - Series MSF Sealants

Sealant Material	Code	Colour	Example	Operating Temperature Range	Re-usable	Material definition and properties
Neoprene	N	Green		-40°C to +90°C	✓	Synthetic rubber based on polychloroprene. The elastic properties of the polymer are enhanced by vulcanization. It is much more resistant to heat, light, oxidation, and petroleum than ordinary rubber.
Viton®	V	Brown		-40°C to +225°C (intermittently to +285°C)	✓	Fluoroelastomer. Resists hydrocarbons, corrosive chemicals and petroleum. Solvent, acid and base resistant. Low permeation rate. Mechanically robust at high temperatures.
PTFE	T	White		-200°C to +250°C	✓	Polytetrafluoroethylene. FDA approved grade to Title 21-CFR 17. 1550 and is approved to US Pharmacopoeia Class VI. Has smooth, non-wetting, hydrophobic surfaces that resist biofilm buildup and the lowest coefficient of friction of any solid material. Low thermal transfer.
Graffite™	G	Grey / Black		-200°C to +550°C (to +870°C in a reducing atmosphere)	✗	Graphite 98% purity. Impermeable to gases and liquids. Resistant to most media, not 'wetted' by molten metals or salts. Asbestos-free. No ageing or embrittlement. Good resistance to thermal shock. Conductive material (not electrically isolated).
Lava	L	Grey Stone		-200°C to +870°C	✗	Natural Magnesium Silicate (Soapstone, Steatite or Rock Talc). Crushes to a powder when compressed. Hygroscopic. Porous to light gases. Unsuitable for use with liquid media and in most vacuum applications.

Other sealant materials may be specified, usually for the individual special requirements of particular applications. Please contact TC Ltd. for assistance.










Section 2 - Series MSF Body Size, Pressure Guide¹ and available Bore Sizes for BSPT, BSPP and NPT Threads²










Body Size		Size 2 (1/4")					Size 3 (1/2")					Size 4 (3/4")					Size 5 (1")									
Sealant		No. of Elements	G	L	N	T	V	No. of Elements	G	L	N	T	V	No. of Elements	G	L	T	V	No. of Elements	G	L	T	V			
Element Sizes (dia)		The maximum guide pressure value (in bar) at 20°C is shown for each sealant material according to element size ¹ . These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.																								
inches	mm																									
0.040	1.0	2 to 3			200	200		2 to 5						2 to 9				250								
0.059	1.5		400	550			200		2 to 4	550	550	300	200	350		2 to 7		450			300					
0.062	1.59				150		150		2 to 3							2 to 6			200							
0.080	2.0	2			150		100					270	150	300	2 to 4				450		270	5	150	100	80	100
0.118	3.0																			2 to 3	300					
0.125	3.2																			100	200		3			
0.177	4.5											250	100	200		2 to 3			4							
0.187	4.76																	300		100	200		100	55	55	30
0.236	6.0																		2							
0.250	6.35																									










¹ The guide pressures shown for each type of sealant are at 20°C. Spectite® feedthroughs from TC Ltd. have been designed to provide an efficient seal on the elements and restrain them from moving under pressure and vacuum. It is good installation practice to provide additional, mechanical restraint to the elements when differential pressure exceeds 50% of the feedthrough guide pressure value at 20°C. With an increase in temperature, a reduction in the maximum guide pressure value can be expected. These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.












² Other types of process connection are available, see Section 3.

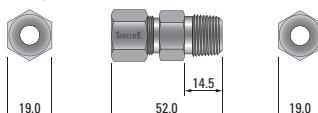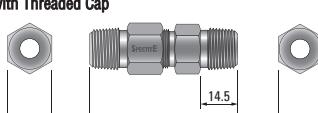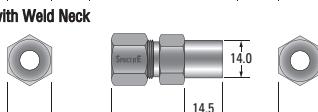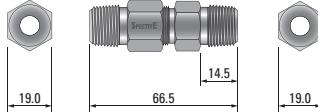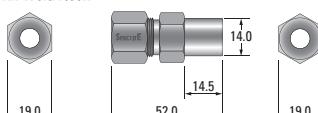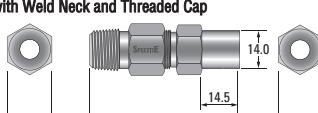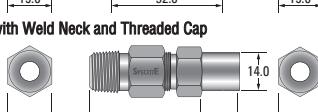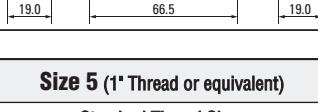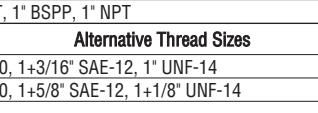Section 3 - Series MSF Body Size and available Bore Sizes for all Thread Types - please refer to table for guide pressures in Section 2

Size 2 (1/4" Thread or equivalent)				
Standard Thread Sizes				
1/4" BSPT, 1/4" BSPP, 1/4" NPT				
Alternative Thread Sizes				
M10x1.0, 7/16" UNF-20				
M12x1.5, 1/2" UNF-20				
Standard Fitting				
				
Fitting with Threaded Cap	19.0	52.0	14.5	19.0
				
Fitting with Weld Neck	19.0	52.0	14.0	19.0
				
Fitting with Weld Neck and Threaded Cap	19.0	66.5	14.0	19.0

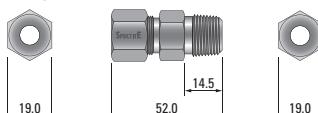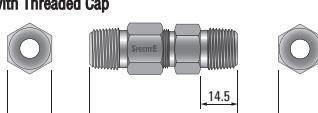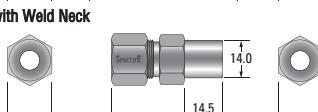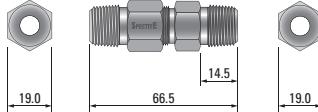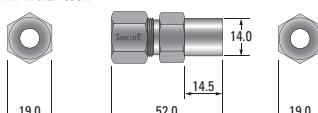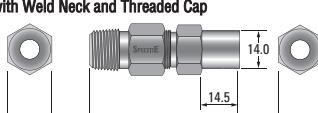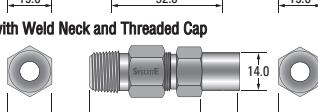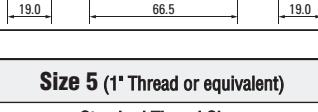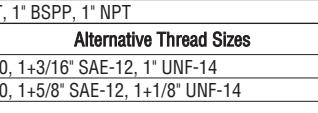Size 3 (1/2" Thread or equivalent)				
Standard Thread Sizes				
1/2" BSPT, 1/2" BSPP, 1/2" NPT				
Alternative Thread Sizes				
3/8" BSPT, 3/8" BSPP, 3/8" NPT				
M14x1.5, 7/16" SAE-20, 9/16" UNF-18				
M16x1.5, 1/2" SAE-20, 5/8" UNF-18				
M20x1.5, 9/16" SAE-24, 3/4" UNF-16				
Standard Fitting				
				
Fitting with Threaded Cap	28.5	67.5	20.0	25.0
				
Fitting with Weld Neck	28.5	87.5	20.0	25.0
				
Fitting with Weld Neck and Threaded Cap	28.5	67.5	22.0	25.0

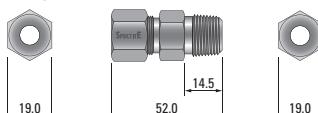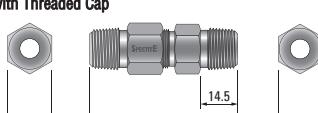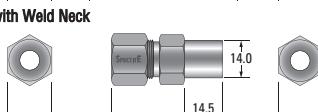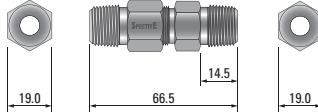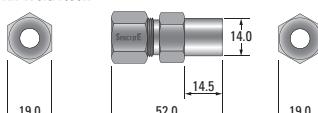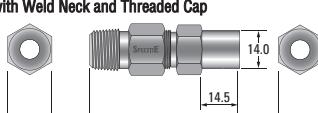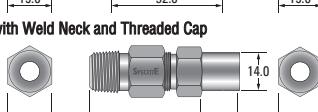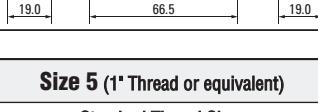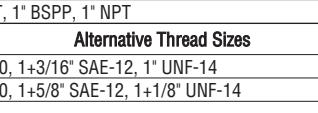
Size 4 (3/4" Thread or equivalent)				
Standard Thread Sizes				
3/4" BSPT, 3/4" BSPP, 3/4" NPT				
Alternative Thread Sizes				
M22x1.5, 3/4" SAE-16, 7/8" UNF-14				
M24x2.0, 7/8" SAE-14, 1" UNF-14				
Standard Fitting				
				
Fitting with Threaded Cap	38.0	86.0	20.0	32.0
				
Fitting with Weld Neck	38.0	106.0	20.0	32.0
				
Fitting with Weld Neck and Threaded Cap	38.0	106.0	27.0	32.0

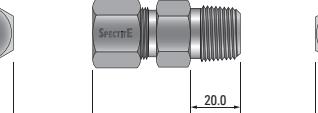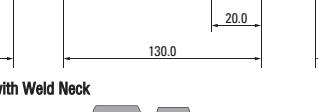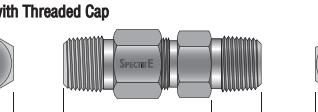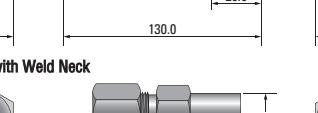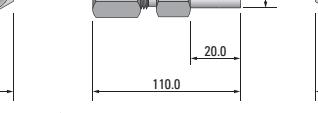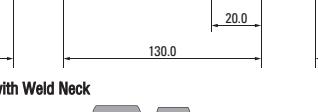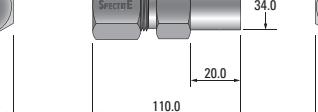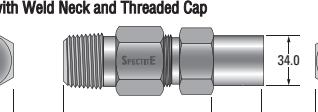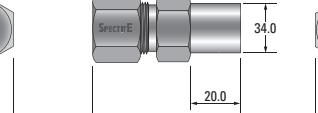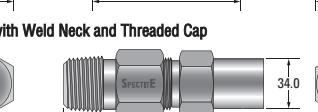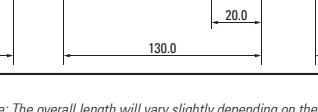Size 5 (1" Thread or equivalent)				
Standard Thread Sizes				
1" BSPT, 1" BSPP, 1" NPT				
Alternative Thread Sizes				
M27x2.0, 1+3/16" SAE-12, 1" UNF-14				
M33x2.0, 1+5/8" SAE-12, 1+1/8" UNF-14				
Standard Fitting				
				
Fitting with Threaded Cap	50.8	110.0	20.0	50.8
				
Fitting with Weld Neck	50.8	130.0	20.0	50.8
				
Fitting with Weld Neck and Threaded Cap	50.8	110.0	34.0	50.8
				
Fitting with Threaded Cap	50.8	130.0	20.0	50.8

Clearance Sizes for split internal components	
Process Connection Size	Max. Clearance Size
Size 2 (1/4")	8.2mm Ø
Size 3 (1/2")	12.2mm Ø
Size 4 (3/4")	20.2mm Ø
Size 5 (1")	25.6mm Ø

Please note: The overall length will vary slightly depending on the sealant used and the tube size.

Section 4 - Series MSF Cap Configuration

Style A	Description	Style B	Description
	Standard Fitting with single thread for direct mounting into process.		Standard Fitting with a Style B threaded extension for conduit/terminal head or enclosure connection. The thread form is the same as the process thread unless otherwise specified. <i>If a different thread form is required, please specify after the 'B' in the order code, for example: MSF3 - 1/2" BSPT - 1.5 - 4 - G - B NPT</i> <i>If a B cap is used with a weld neck fitting, then the thread form must be specified.</i>

Section 5 - Series MSF - Optional Flange Details

Style	Example	Part Code	Maximum Compatible Body Size	Outside Diameter	Thickness
KF FLANGE		KF16	Size 2	30mm	5.08mm
		KF25	Size 3	40mm	5.08mm
		KF40	Size 5	55mm	5.08mm
		KF50	Size 5	75mm	5.08mm
CF FLANGE		DN16CF	Size 3	33.8mm	7.6mm
		DN25CF	Size 4	54.0mm	11.9mm
		DN35-40CF	Size 5	69.9mm	12.7mm
		DN50CF	Size 5	85.7mm	16.0mm
		DN63CF	Size 5	114.3mm	17.3mm

All flanges are supplied in 304L stainless steel as standard. Hygienic and Food Grade Flanges are also available - please contact us for further details.

CF Flanges are non-rotatable (fixed) type and comply with ISO3669-2017.

KF Flanges are compatible to the ISO Standard 2861 Specification.

Many other styles of flange available on request (DIN, JIS, ANSI, etc.), contact TC Ltd. for details


Series MSF Torque Settings - Max. values in Nm

Process Connection Size	Sealants				
	G	L	N	T	V
Size 2 (1/4")	50	60	40	35	40
Size 3 (1/2")	165	190	125	115	125
Size 4 (3/4")	260	300	-	150	175
Size 5 (1")	400	350	-	250	350

G = Graftite™, L = Lava, N = Neoprene, T = PTFE, V = Viton®

To convert: ft/lb = Nm x 0.738; Kg/cm = Nm x 10.2.

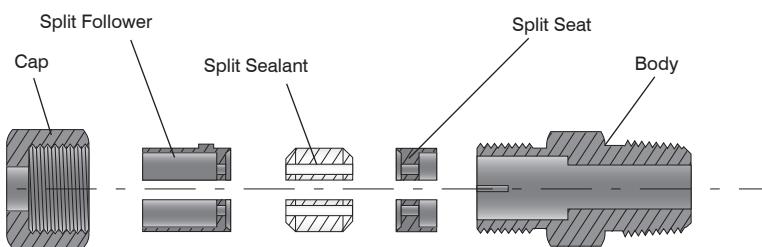Series MSF Schematic



Typical components shown for an MSF Series fitting.

Series MSF - Order Code Examples

Feedthrough Series	Feedthrough Size (see Section 3)	Process Connection (see Section 3)	Element Diameter (see Section 2)	No. of Elements (see Section 2)	Sealant (see Section 1)	Cap Configuration (see Section 4)	Flange Details (only available with a weld neck)
MSF	2	-	1/4" NPT	-	1.5	-	3 - T - B
MSF	3	-	1/2" BSPT	-	3.2	-	2 - L - A
MSF	4	-	WELD	-	6.0	-	2 - G - A - KF50

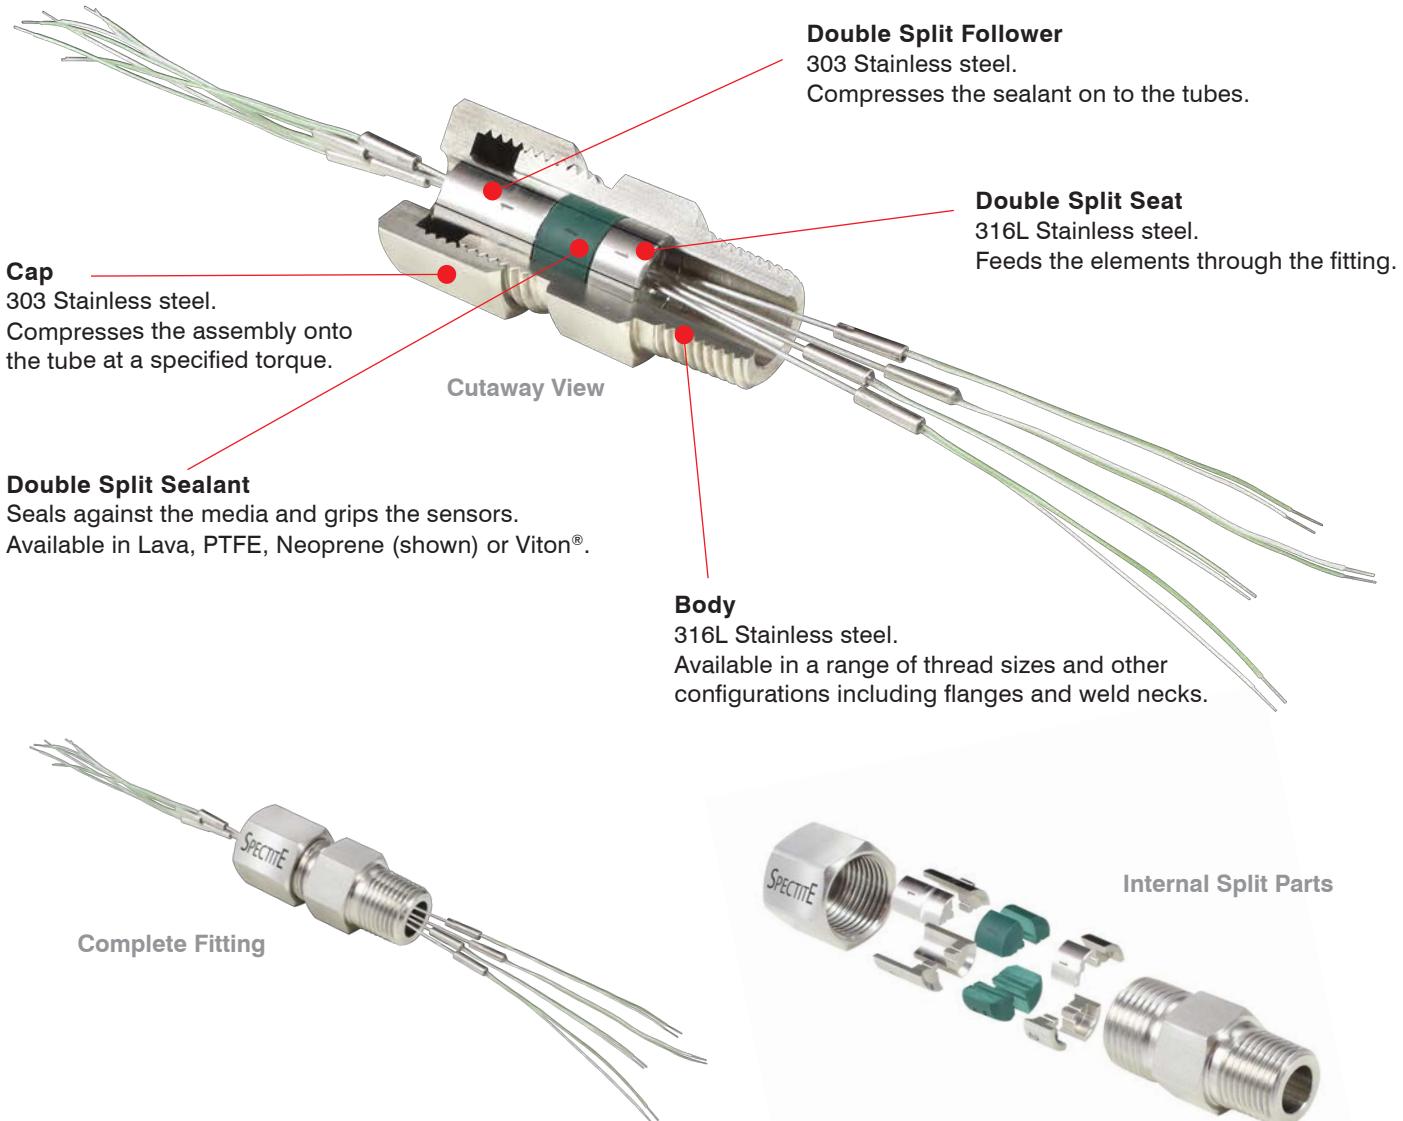
Series MSFD

Double Split Feedthroughs for Multiple Elements

Series MSFD feedthroughs are similar to Series MSF feedthroughs, but have double split internal components, allowing a larger number of inserts to be sealed.

This permits components larger than the element being sealed to be passed through the gland body during installation. Examples are probes with fitted connectors and sensors with pot seals or bulbs.

Typical Construction



- Individual elements can be easily replaced without the complete disassembly of the fitting
- Internal components – follower, sealant and seat are split to allow easy installation of elements with fitted connectors or large diameter sections
- Designed for carrying multiple elements 1.0mm to 6.35mm diameter
- Guide pressure range: Vacuum up to 450 bar
- Temperature range: -200°C to +870°C
- 316L Stainless steel wetted parts (see above)
- Choice of sealant materials
- Immersion length of each element easily adjusted
- Reusable fitting – internal components replaceable - see page 52

Alternative Configurations



Threaded Extension (B Cap)

Allows the gland to be terminated into the process as well as to a terminal head or conduit at the opposite end to the process. See section 4 for details.



Weld Neck

Supplied without thread for permanent installation into the process by welding. Specify as 'WELD' for the thread size in the order code.



Flanges

For termination to a mating flange within the process, see section 5 for details of the flanges available as standard.

Section 1 - Series MSFD Sealants

Sealant Material	Code	Colour	Example	Operating Temperature Range	Re-usable	Material definition and properties
Neoprene	N	Green		-40°C to +90°C	✓	Synthetic rubber based on polychloroprene. The elastic properties of the polymer are enhanced by vulcanization. It is much more resistant to heat, light, oxidation, and petroleum than ordinary rubber.
Viton®	V	Brown		-40°C to +225°C (intermittently to +285°C)	✓	Fluor elastomer. Resists hydrocarbons, corrosive chemicals and petroleum. Solvent, acid and base resistant. Low permeation rate. Mechanically robust at high temperatures.
PTFE	T	White		-200°C to +250°C	✓	Polytetrafluoroethylene. FDA approved grade to Title 21-CFR 17. 1550 and is approved to US Pharmacopoeia Class VI. Has smooth, non-wetting, hydrophobic surfaces that resist biofilm buildup and the lowest coefficient of friction of any solid material. Low thermal transfer.
Lava	L	Grey Stone		-200°C to +870°C	✗	Natural Magnesium Silicate (Soapstone, Steatite or Rock Talc). Crushes to a powder when compressed. Hygroscopic. Porous to light gases. Unsuitable for use with liquid media and in most vacuum applications.

Other sealant materials may be specified, usually for the individual special requirements of particular applications. Please contact TC Ltd. for assistance.

Section 2 - Series MSFD Body Size, Pressure Guide¹ and available Bore Sizes for BSPT, BSPP and NPT Threads²

Body Size		Size 2 (1/4")				No. of Elements	Size 3 (1/2")				No. of Elements	Size 4 (3/4")				No. of Elements	Size 5 (1")			
Sealant		L	N	T	V		L	N	T	V		L	T	V	L	T	V			
Element Sizes (dia)		The maximum guide pressure value (in bar) at 20°C is shown for each sealant material according to element size ¹ . These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.																		
inches	mm	4 to 8	150	150			4 to 8	250	150	300	4 to 12	200	200	250						
0.040	1.0	4 to 8	150	150			4 to 8	250	150	300	4 to 12	200	200	250						
0.059	1.5	450	100	100			450	200	100	250	4 to 8	150	150	200						
0.062	1.59	4	100	80			4	200	80	150	4 to 8	350	350	400						
0.080	2.0														4 to 8	80	60	80		
0.118	3.0																			
0.125	3.2																			
0.177	4.5																			
0.187	4.76																			
0.236	6.0																			
0.250	6.35																			

¹ The guide pressures shown for each type of sealant are at 20°C. Spectite® feedthroughs from TC Ltd. have been designed to provide an efficient seal on the elements and restrain them from moving under pressure and vacuum. It is good installation practice to provide additional, mechanical restraint to the elements when differential pressure exceeds 50% of the feedthrough guide pressure value at 20°C. With an increase in temperature, a reduction in the maximum guide pressure value can be expected. These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.

² Other types of process connection are available, see Section 3.

Section 3 - Series MSFD Body Size and available Bore Sizes for all Thread Types - please refer to table for guide pressures in Section 2

Size 2 (1/4" Thread or equivalent)		
Standard Thread Sizes		
1/4" BSPT, 1/4" BSPP, 1/4" NPT		
Alternative Thread Sizes		
M10x1.0, 7/16" UNF-20		
M12x1.5, 1/2" UNF-20		
Standard Fitting		
Fitting with Threaded Cap		
Fitting with Weld Neck		
Fitting with Weld Neck and Threaded Cap		

Size 3 (1/2" Thread or equivalent)		
Standard Thread Sizes		
1/2" BSPT, 1/2" BSPP, 1/2" NPT		
Alternative Thread Sizes		
3/8" BSPT, 3/8" BSPP, 3/8" NPT		
M14x1.5, 7/16" SAE-20, 9/16" UNF-18		
M16x1.5, 1/2" SAE-20, 5/8" UNF-18		
M20x1.5, 9/16" SAE-24, 3/4" UNF-16		
Standard Fitting		
Fitting with Threaded Cap		
Fitting with Weld Neck		
Fitting with Weld Neck and Threaded Cap		


Size 4 (3/4" Thread or equivalent)		
Standard Thread Sizes		
3/4" BSPT, 3/4" BSPP, 3/4" NPT		
Alternative Thread Sizes		
M22x1.5, 3/4" SAE-16, 7/8" UNF-14		
M24x2.0, 7/8" SAE-14, 1" UNF-14		
Standard Fitting		
Fitting with Threaded Cap		
Fitting with Weld Neck		
Fitting with Weld Neck and Threaded Cap		

Size 5 (1" Thread or equivalent)		
Standard Thread Sizes		
1" BSPT, 1" BSPP, 1" NPT		
Alternative Thread Sizes		
M27x2.0, 1+3/16" SAE-12, 1" UNF-14		
M33x2.0, 1+5/8" SAE-12, 1+1/8" UNF-14		
Standard Fitting		
Fitting with Threaded Cap		
Fitting with Weld Neck		
Fitting with Weld Neck and Threaded Cap		

Clearance Sizes for split internal components	
Body	Clearance Ø
Process Connection Size	Max. Clearance Size
Size 2 (1/4")	8.2mm Ø
Size 3 (1/2")	12.2mm Ø
Size 4 (3/4")	20.2mm Ø
Size 5 (1")	25.6mm Ø

Please note: The overall length will vary slightly depending on the sealant used and the tube size.

Section 4 - Series MSFD Cap Configuration

Style A	Description	Style B	Description
	Standard Fitting with single thread for direct mounting into process.		Standard Fitting with a Style B threaded extension for conduit/terminal head or enclosure connection. The thread form is the same as the process thread unless otherwise specified. <i>If a different thread form is required, please specify after the 'B' in the order code, for example: MSFD3 - 1/2" BSPT - 1.5 - 8 - N - B NPT</i> <i>If a B cap is used with a weld neck fitting, then the thread form must be specified.</i>

Section 5 - Series MSFD - Optional Flange Details

Style	Example	Part Code	Maximum Compatible Body Size	Outside Diameter	Thickness
KF FLANGE		KF16	Size 2	30mm	5.08mm
		KF25	Size 3	40mm	5.08mm
		KF40	Size 5	55mm	5.08mm
		KF50	Size 5	75mm	5.08mm
CF FLANGE		DN16CF	Size 3	33.8mm	7.6mm
		DN25CF	Size 4	54.0mm	11.9mm
		DN35-40CF	Size 5	69.9mm	12.7mm
		DN50CF	Size 5	85.7mm	16.0mm
		DN63CF	Size 5	114.3mm	17.3mm

All flanges are supplied in 304L stainless steel as standard. Hygienic and Food Grade Flanges are also available - please contact us for further details.

CF Flanges are non-rotatable (fixed) type and comply with ISO3669-2017.

KF Flanges are compatible to the ISO Standard 2861 Specification.

Many other styles of flange available on request (DIN, JIS, ANSI, etc.), contact TC Ltd. for details


Series MSFD Torque Settings - Max. values in Nm

Process Connection Size	Sealants			
	L	N	T	V
Size 2 (1/4")	60	40	35	40
Size 3 (1/2")	190	125	115	125
Size 4 (3/4")	300	-	150	175
Size 5 (1")	350	-	250	350

L = Lava, N = Neoprene, T = PTFE, V = Viton®

To convert: ft/lb = Nm x 0.738; Kg/cm = Nm x 10.2.

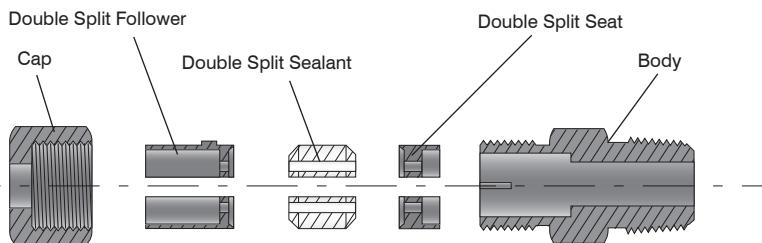Series MSFD Schematic



Typical components shown for an MSFD Series fitting.

Series MSFD - Order Code Examples

Feedthrough Series	Feedthrough Size (see Section 3)	Process Connection (see Section 3)	Element Diameter (see Section 2)	No. of Elements (see Section 2)	Sealant (see Section 1)	Cap Configuration (see Section 4)	Flange Details (only available with a weld neck)
MSFD	2	-	1/4" NPT	-	1.5	-	4 - T - B
MSFD	3	-	1/2" BSPT	-	3.2	-	4 - L - A
MSFD	4	-	WELD	-	6.0	-	4 - N - A - KF50

Series WF Feedthroughs for Multiple Wires & Probes

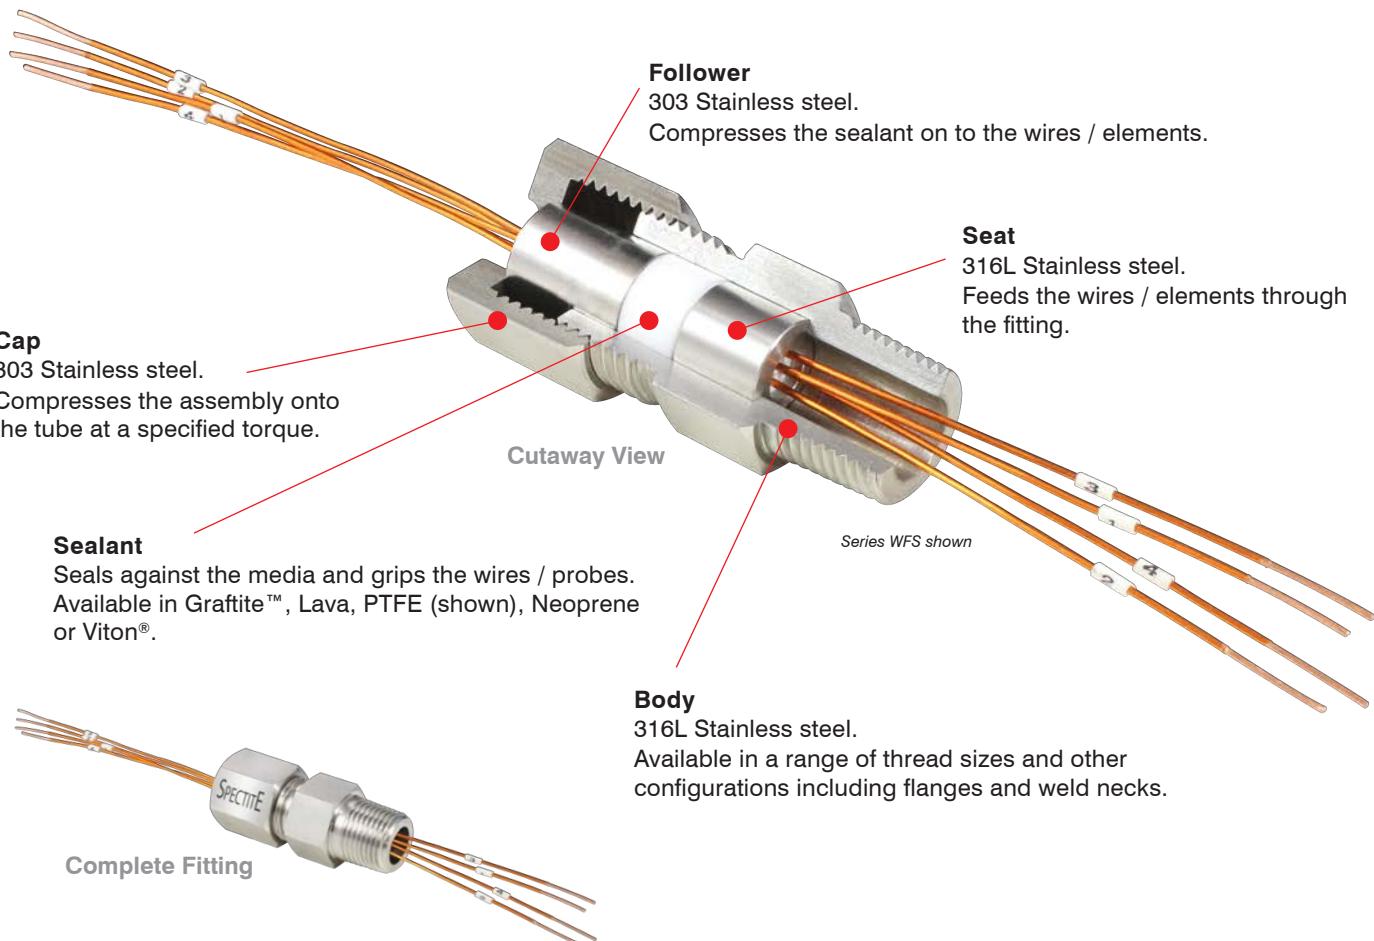
When multiple wires must pass through a pressure boundary, series WF feedthroughs can provide an efficient seal without recourse to epoxies or other non-adjustable fixture methods.

Different types of these assemblies may be specified according to the type of element required to pass through the feedthrough. Series WF assemblies cater for up to 12 bare or insulated wires – sizes from 24AWG (0.2mm²) to 8AWG (approx. 8.8mm²).

Ceramic insulators within WF feedthrough assemblies protect bare wires and provide additional isolation for Kapton® insulated wires. These are rated max. 55A @ 600Vdc/850Vac max. Feedthroughs with power wires can be supplied as complete assemblies, ready for installation, with wires cut to specified lengths.

WF feedthroughs can also accommodate up to 12 small diameter sensor elements that must be electrically isolated from each other.

Typical Construction



- Seal on Kapton® insulated copper or thermocouple wires – **type WFS**
- Seal on PFA/PTFE insulated copper or thermocouple wires – **type WFT**
- Seal on bare wires carrying instrumentation voltages – **type WFR**
- Seal on small diameter sheathed sensors, max. 3.2mm dia. – **type WFP**
- High temperature glands using ceramic insulators – **type WFRH / WFPH**

- Guide pressure range: Vacuum up to 700 bar
- Temperature range: -200°C to +870°C
- 316L Stainless steel wetted parts (see above)
- Choice of sealant materials
- WF glands use ceramic insulators to isolate the sensors from all metal contact
- Individual wires can be replaced without complete disassembly
- Reusable fitting – sealant and internal components replaceable - see page 52



ATEX / IECEx approved versions available, please contact us for more details

Feedthroughs for Multiple Wires & Probes Series WF



WFS

Seal on Kapton® insulated copper or thermocouple wire



WFT

Seal on PFA/PTFE insulated copper or thermocouple wires



WFR

Seal on bare wires carrying instrumentation signals and/or voltages



WFP

Seal on metal sheathed sensors requiring electrical isolation



WFRH / WFPH

High temperature glands using ceramic insulators

Alternative Configurations



Threaded Extension (B Cap)

Allows the gland to be terminated into the process as well as to a terminal head or conduit at the opposite end to the process. See section 4 for details.



Weld Neck

Supplied without thread for permanent installation into the process by welding. Specify as 'WELD' for the thread size in the order code.



Flanges

For termination to a mating flange within the process, see section 5 for details of the flanges available as standard.

Section 1 - Series WF Sealants

Sealant Material	Code	Colour	Example	Operating Temperature Range	Re-usable	Material definition and properties
Neoprene	N	Green		-40°C to +90°C	✓	Synthetic rubber based on polychloroprene. The elastic properties of the polymer are enhanced by vulcanization. It is much more resistant to heat, light, oxidation, and petroleum than ordinary rubber.
Viton®	V	Brown		-40°C to +225°C (intermittently to +285°C)	✓	Fluoroelastomer. Resists hydrocarbons, corrosive chemicals and petroleum. Solvent, acid and base resistant. Low permeation rate. Mechanically robust at high temperatures.
PTFE	T	White		-200°C to +250°C	✓	Polytetrafluoroethylene. FDA approved grade to Title 21-CFR 17. 1550 and is approved to US Pharmacopoeia Class VI. Has smooth, non-wetting, hydrophobic surfaces that resist biofilm buildup and the lowest coefficient of friction of any solid material. Low thermal transfer.
Graffite™	G	Grey / Black		-200°C to +550°C (to +870°C in a reducing atmosphere)	✗	Graphite 98% purity. Impermeable to gases and liquids. Resistant to most media, not 'wetted' by molten metals or salts. Asbestos-free. No ageing or brittleness. Good resistance to thermal shock. Conductive material (not electrically isolated).
Lava	L	Grey Stone		-200°C to +870°C	✗	Natural Magnesium Silicate (Soapstone, Steatite or Rock Talc). Crushes to a powder when compressed. Hygroscopic. Porous to light gases. Unsuitable for use with liquid media and in most vacuum applications.

Other sealant materials may be specified, usually for the individual special requirements of particular applications. Please contact TC Ltd. for assistance.

Section 2a - Body Size, Pressure Guide¹ and available Bore Sizes for BSPT, BSPP and NPT Threads²

Series WFS - Kapton® insulated wires - Max. 230°C rated

Body Size		No. of Elements	Size 1 (1/8")					No. of Elements	Size 2 (1/4")					No. of Elements	Size 3 (1/2")					No. of Elements	Size 4 (3/4")				
Sealant			G*	L	N	T	V		G*	L	N	T	V		G*	L	N	T	V		G*	L	T	V	
Wire Size		The maximum guide pressure value (in bar) at 20°C is shown for each sealant material according to element size ¹ . These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.																							
AWG	diam. (mm)	24 Cu or T/C	0.5mm	2, 4	300	400	250	250	2, 4	300	400	250	250	250											
20 Cu or T/C	0.8mm																								
18 Cu	1.0mm																								
16 Cu	1.3mm																								
14 Cu	1.6mm																								
12 Cu	2.0mm																								
10 Cu	2.5mm																								
8 Cu	3.2mm																								

Series WFS feedthroughs are supplied with Kapton® insulated copper or thermocouple material wire to specified lengths, if required. The wires are fitted in the feedthrough, both ends of each wire, or Thermocouple pair, are identified with numbered markers and the feedthrough is torqued ready for installation.

Current ratings for Kapton® insulated copper wire:

Wire Size (AWG)	24	20	18	16	14	12	10	8
Max. current rating (A) at 230°C 600V AC / 850V DC max.	5	9	13	17	24	30	40	55

Section 2b - Body Size, Pressure Guide¹ and available Bore Sizes for BSPT, BSPP and NPT Threads²

Series WFT - PFA insulated wires - Max. 230°C rated

Body Size		No. of Elements	Size 1 (1/8")				No. of Elements	Size 2 (1/4")				No. of Elements	Size 3 (1/2")				No. of Elements	Size 4 (3/4")					
Sealant			L	N	T	V		G*	L	N	T	V	G*	L	N	T	V	G*	L	T	V		
Wire Size		The maximum guide pressure value (in bar) at 20°C is shown for each sealant material according to element size ¹ . These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.																					
AWG	diam. (mm)	24 Cu or T/C	0.5mm	2, 4	400	250	250	2, 4	300	400	250	250	250										
20 Cu or T/C	0.8mm																						

Series WFT feedthroughs are supplied with PFA insulated copper or thermocouple material wire to specified lengths, if required. The wires are fitted in the feedthrough, both ends of each wire, or Thermocouple pair, are identified with numbered markers and the feedthrough is torqued ready for installation.

* Graffite™ sealants are conductive. Extra care must be taken where high voltages are present. Please contact TC Ltd for further guidance.

1 The guide pressures shown for each type of sealant are at 20°C. Spectite® feedthroughs from TC Ltd. have been designed to provide an efficient seal on the elements and restrain them from moving under pressure and vacuum. It is good installation practice to provide additional, mechanical restraint to the elements when differential pressure exceeds 50% of the feedthrough guide pressure value at 20°C. With an increase in temperature, a reduction in the maximum guide pressure value can be expected. These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.

2 Other types of process connection are available, see Section 3.

Section 2c - Body Size, Pressure Guide¹ and available Bore Sizes for BSPT, BSPP and NPT Threads²

Series WFR - Bare wires, Series WFP - Multiple Sensors - Max. 230°C rated

Body Size		No. of Elements	Size 1 (1/8")				No. of Elements	Size 2 (1/4")				No. of Elements	Size 3 (1/2")				Size 4 (3/4")			
Sealant			L	N	T	V		L	N	T	V		L	N	T	V	L	T	V	
WFR Wire Sizes (AWG)	WFP Element dia (mm)	<p><i>The maximum guide pressure value (in bar) at 20°C is shown for each sealant material according to element size¹. These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.</i></p>																		
24	0.5	2, 4	400	250	250	250	2, 4	400	250	250	250	2, 3	700	400	250	450	6, 8, 12			
20	0.8											4, 6								
18	1.0											8					2, 4	550	250	350
14	1.5																			
8	3.0																			
	3.2																			

Section 2d - Body Size, Pressure Guide¹ and available Bore Sizes for BSPT, BSPP and NPT Threads²

Series WFRH / WFPH - High Temperature - Max. 870°C rated

Body Size		No. of Elements	Size 1 (1/8")			No. of Elements	Size 2 (1/4")			No. of Elements	Size 3 (1/2")			No. of Elements	Size 4 (3/4")			
Sealant			L				L				L				L			
WFRH Wire Sizes (AWG)	WFPH Element dia (mm)	<p><i>The maximum guide pressure value (in bar) at 20°C is shown for each sealant material according to element size¹. These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.</i></p>																
24	0.5	2, 4																
20	0.8		400				2, 4		400									
18	1.0															700		
14	1.5																6, 8, 12	
8	3.0																2, 4	550
	3.2																	

1 The guide pressures shown for each type of sealant are at 20°C. Spectite® feedthroughs from TC Ltd. have been designed to provide an efficient seal on the elements and restrain them from moving under pressure and vacuum. It is good installation practice to provide additional, mechanical restraint to the elements when differential pressure exceeds 50% of the feedthrough guide pressure value at 20°C. With an increase in temperature, a reduction in the maximum guide pressure value can be expected. These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.

2 Other types of process connection are available, see Section 3.

Section 3 - Series WF Body Size and available Bore Sizes for all Thread Types - please refer to table for guide pressures in Section 2

Size 1 (1/8" Thread or equivalent)		
Standard Thread Sizes		
1/8" BSPT, 1/8" BSPP, 1/8" NPT		
Alternative Thread Sizes		
M8x1.0, 3/8" UNF-24		
M10x1.0, 7/16" UNF-20		
Standard Fitting		
Fitting with Threaded Cap		
Fitting with Weld Neck		
Fitting with Weld Neck and Threaded Cap		


Size 2 (1/4" Thread or equivalent)		
Standard Thread Sizes		
1/4" BSPT, 1/4" BSPP, 1/4" NPT		
Alternative Thread Sizes		
M10x1.0, 7/16" UNF-20		
M12x1.5, 1/2" UNF-20		
Standard Fitting		
Fitting with Threaded Cap		
Fitting with Weld Neck		
Fitting with Weld Neck and Threaded Cap		

Size 3 (1/2" Thread or equivalent)		
Standard Thread Sizes		
1/2" BSPT, 1/2" BSPP, 1/2" NPT		
Alternative Thread Sizes		
3/8" BSPT, 3/8" BSPP, 3/8" NPT		
M14x1.5, 7/16" SAE-20, 9/16" UNF-18		
M16x1.5, 1/2" SAE-20, 5/8" UNF-18		
M20x1.5, 9/16" SAE-24, 3/4" UNF-16		
Standard Fitting		
Fitting with Threaded Cap		
Fitting with Weld Neck		
Fitting with Weld Neck and Threaded Cap		

Size 4 (3/4" Thread or equivalent)		
Standard Thread Sizes		
3/4" BSPT, 3/4" BSPP, 3/4" NPT		
Alternative Thread Sizes		
M22x1.5, 3/4" SAE-16, 7/8" UNF-14		
M24x2.0, 7/8" SAE-14, 1" UNF-14		
Standard Fitting		
Fitting with Threaded Cap		
Fitting with Weld Neck		
Fitting with Weld Neck and Threaded Cap		

Please note: The overall length will vary slightly depending on the sealant used and the tube size.

Section 4 - Series WF Cap Configuration

Style A	Description	Style B	Description
	Standard Fitting with single thread for direct mounting into process.		Standard Fitting with a Style B threaded extension for conduit/terminal head or enclosure connection. The thread form is the same as the process thread unless otherwise specified. <i>If a different thread form is required, please specify after the 'B' in the order code, for example: WFP3 - 1/2" BSPT - 1.0 - 8 - V - B NPT</i> <i>If a B cap is used with a weld neck fitting, then the thread form must be specified.</i>

Section 5 - Series WF - Optional Flange Details

Style	Example	Part Code	Maximum Compatible Body Size	Outside Diameter	Thickness
KF FLANGE		KF16	Size 2	30mm	5.08mm
		KF25	Size 3	40mm	5.08mm
CF FLANGE		DN16CF	Size 3	33.8mm	7.6mm
		DN25CF	Size 4	54.0mm	11.9mm

All flanges are supplied in 304L stainless steel as standard. Hygienic and Food Grade Flanges are also available - please contact us for further details.

CF Flanges are non-rotatable (fixed) type and comply with ISO3669-2017.

KF Flanges are compatible to the ISO Standard 2861 Specification.

Many other styles of flange available on request (DIN, JIS, ANSI, etc.), contact TC Ltd. for details


Series WF Torque Settings - Max. values in Nm

Process Connection Size	Sealants				
	G	L	N	T	V
Size 1 (1/8")	40	45	35	30	35
Size 2 (1/4")	50	60	40	35	40
Size 3 (1/2")	165	190	125	115	125
Size 4 (3/4")	260	300	-	150	175

G = Graftite™, L = Lava, N = Neoprene, T = PTFE, V = Viton®

To convert: ft/lb = Nm x 0.738; Kg/cm = Nm x 10.2.

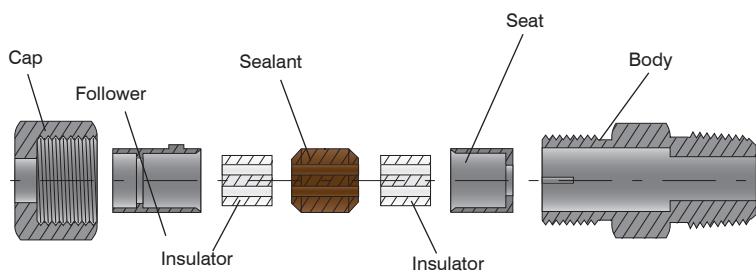Series WF Schematic



Typical components shown for a WF Series fitting.

Series WF - Order Code Examples

Feedthrough Series	Feedthrough Size (see Sec. 3)	Process Connection (see Section 3)	Element Diameter (see Sec. 2)	No. of Elements (see Sec. 2)	Sealant (see Sec. 1)	Cap (see Sec. 4)	Wire Length CAP SIDE	Wire Length PROCESS SIDE	Flange Details (only available with a weld neck)
WFS	2	- 1/4" BSPT	- 24K	- 4	- V	- A	- 1200mm	- 1200mm	
WFR	4	- 3/4" NPT	- 14AWG	- 12	- T	- B	- not applicable	- not applicable	
WFT	2	- 1/4" BSPT	- 24K	- 4	- T	- A	- 800mm	- 800mm	
WFP	3	- 1/2" BSPT	- 1.0	- 8	- L	- A	- not applicable	- not applicable	
WFS	4	- WELD	- 14cu	- 8	- G	- A	- 1000mm	- 1000mm	- KF50

Note: if no wire length is specified in the part code fitting will be supplied as WFR/WFP type (without wires).

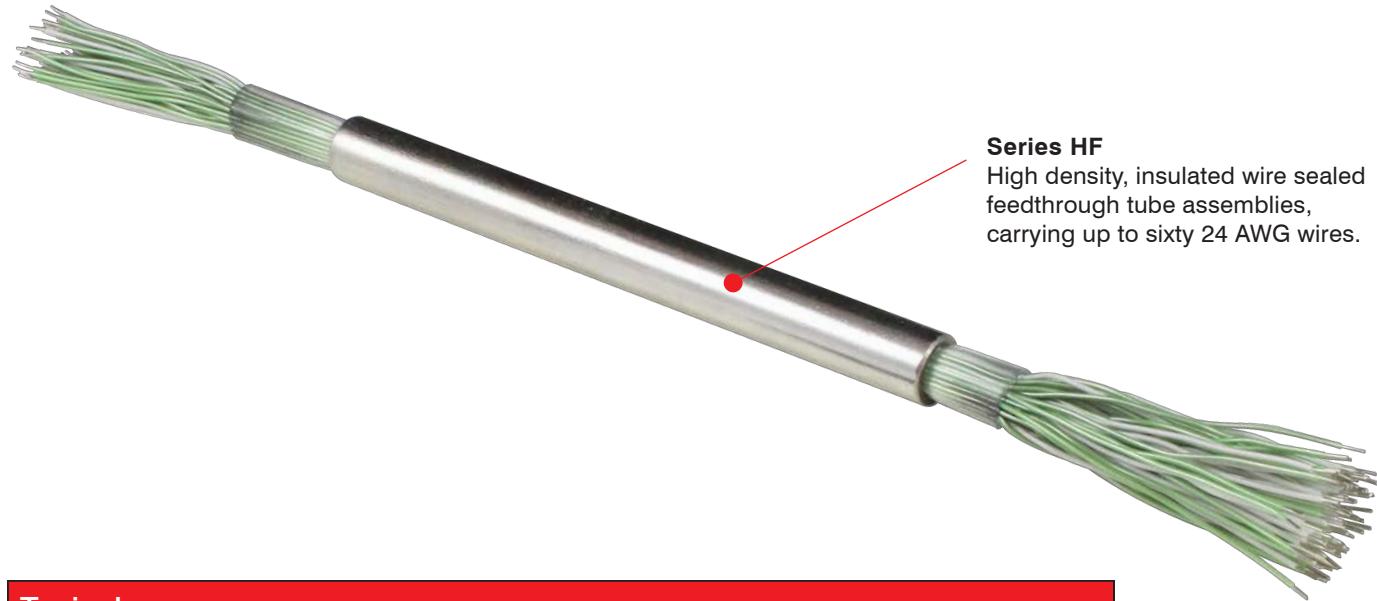
Series HF High Density Sealed Tubes

An FEP lined, stainless steel tube is swaged over multiple, insulated, single-core copper and/or thermocouple material wires to make a continuous wire, high-density, sealed feedthrough tube with up to 60 wires. These are used for thermocouples, resistance thermometers and low voltage instrumentation. The sealed tube assembly is usually mounted in a Series PF or MF feedthrough. Series HF

feedthroughs are manufactured with customer-specified wire lengths.

Epoxies and other sealants are not used in the construction of HF feedthroughs, sealed tubes. They are suitable for use where outgassing is not permitted. The thermocouple pairs are available with or without junctions. Please contact us for further details.


Typical Construction



Series HF

High density, insulated wire sealed feedthrough tube assemblies, carrying up to sixty 24 AWG wires.

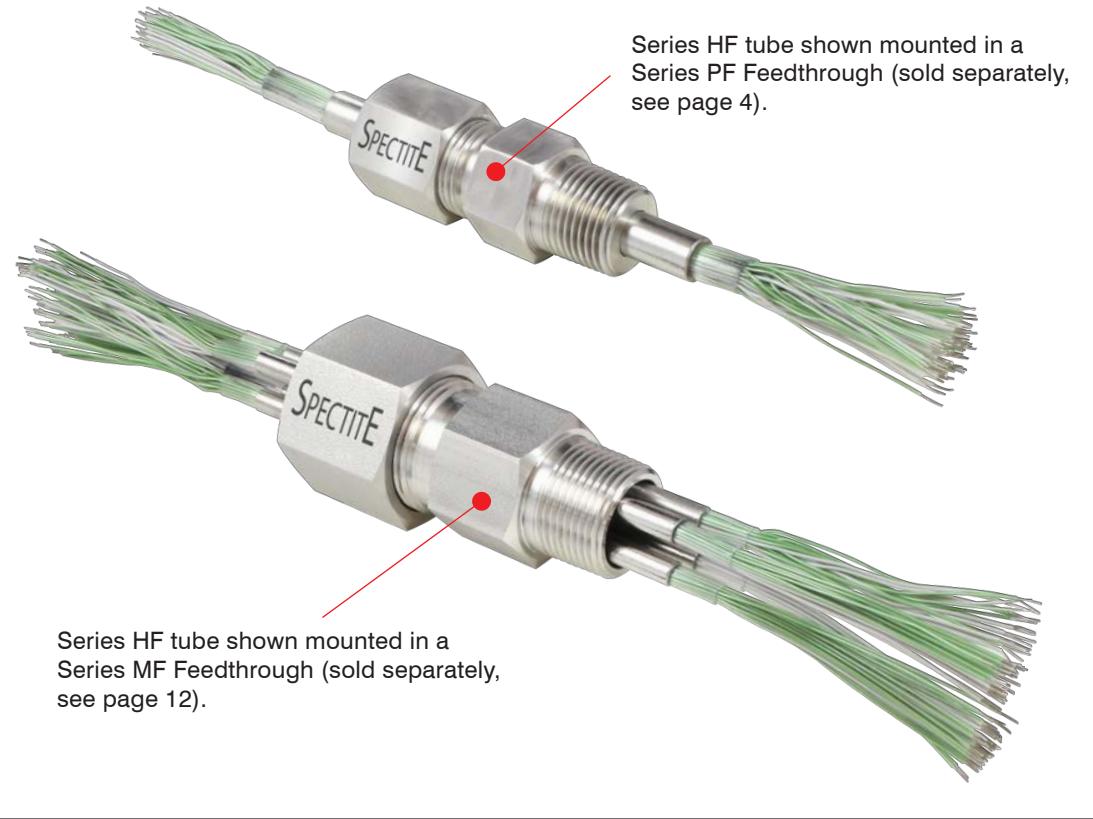Typical usage



Series HF tube shown mounted in a Series PF Feedthrough (sold separately, see page 4).

Series HF tube shown mounted in a Series MF Feedthrough (sold separately, see page 12).



ATEX / IECEx approved versions available, please contact us for more details

Series HF High Density Sealed Tubes

- **Single tube assembly mounts in a series PF or PSF feedthrough, sold separately - see pages 4 / 8**
- **Multiple tubes mount in a series MF or MSF feedthrough, sold separately - see pages 12 / 16**
- Saves time and costs by allowing multiple sensor wires to pass through a feedthrough as a single element
- Sealed tubes with continuous, multiple, insulated conductors
- Stainless steel tube (316L) is sealed without potting, epoxies or glues
- Copper or thermocouple-material wires
- Max. current rating per wire 500mA at 100Vdc
- Guide pressure range: Vacuum up to 350 bar with low leak rate
- Temperature rating: -40°C to +125°C
- 4 tube sizes carrying 12, 24, 40 or 60 size 24AWG copper or thermocouple material wires

Series HF - Colour Codes			RTD Wires		Standard Copper 'Triples'						
Thermocouple Pairs			Wires bunched and numbered as Triples or Quads.		Wires bunched as 'triples' with each triple numbered and containing 1 red, 1 white and 1 other colour as shown below.						
Thermocouple Type	IEC 60584.3	ANSI MC96.1	3 wire	4 wire	Number of Wires	12 wire	24 wire	40 wire	60 wire		
	IEC	ANSI	RTD3	RTD4	Part Code	STD	STD	STD	STD		
K	Green	Yellow	Red	Red	Triple 1	Yellow	Yellow	Yellow	Yellow		
	White	Red	Red	Red	Triple 2	Blue	Blue	Blue	Blue		
T	Brown	Blue	White	White	Triple 3	Black	Black	Black	Black		
	White	Red	White	White	Triple 4	Green	Green	Green	Green		
J	Black	White		Triple 5		Brown	Brown	Brown			
	White	Red		Triple 6		Lilac	Lilac	Lilac			
N	Pink	Orange		Triple 7		Orange	Orange	Orange			
	White	Red		Triple 8		Pink	Pink	Pink			
R/S	Orange	Black		Triple 9		Yellow	Yellow	Yellow			
	White	Red		Triple 10		Blue	Blue	Blue			
E	Purple	Lilac		Triple 11		Black	Black	Black			
	White	Red		Triple 12		Green	Green	Green			
Instrument Pairs					Triple 13		Brown	Brown	Brown		
Pairs bunched and numbered as pairs.					Triple 14			Lilac			
Material					Triple 15				Orange		
Copper	CU2	Red		Triple 16				Pink			
		White		Triple 17				Yellow			
Other colour combinations are available - please contact TC Ltd for more information.					Triple 18				Blue		
					Triple 19				Black		
					Triple 20				Green		

Series HF - Order Code Examples					
Feedthrough Type	No. of wires and Material ² (see above)	Wire Length CAP SIDE ¹ (specify to nearest 100mm, minimum 500mm)	Wire Length PROCESS SIDE ¹ (specify to nearest 100mm, minimum 500mm)	Colour Code (see above)	
HF24	- 24Cu -	1000mm / 2500mm	- RTD3		
HF24	- 12Cu, 12J -	1000mm / 2000mm	- STD - IEC		
HF40	- 40K -	1000mm / 2800mm	- IEC		

1 The wire lengths on each side of the sealed tube are the lengths of wire specified and do not include the length of the metal tube. Dimensions of the sealed tube are shown in the table below.
 2 The number of wires refers to the total number of single wires, both copper and thermocouple wires passing through each size of sealed tube. Each series HF assembly can be specified, if required, with a combination of copper wires and thermocouple pairs.

In the second example 4 triples of copper wire and 6 type-J thermocouple pairs are specified – total 24 wires.
 When configuring these combinations of wires it is essential to verify that the total number of wires specified equals the possible number of wires for the size of tube assembly required, remembering that each thermocouple pair is two wires.

Number of Wires / Tube Dimensions (mm)				
Type	HF12	HF24	HF40	HF60
Number of Wires	12	24	40	60
Tube diameter (mm)	4.5	6.0	8.0	10.0
Tube length (mm)	80	100	100	100

Don't forget to order your feedthrough gland!
 See PF page 4 and MF page 12

Series BSF Feedthroughs for Bearing Sensors

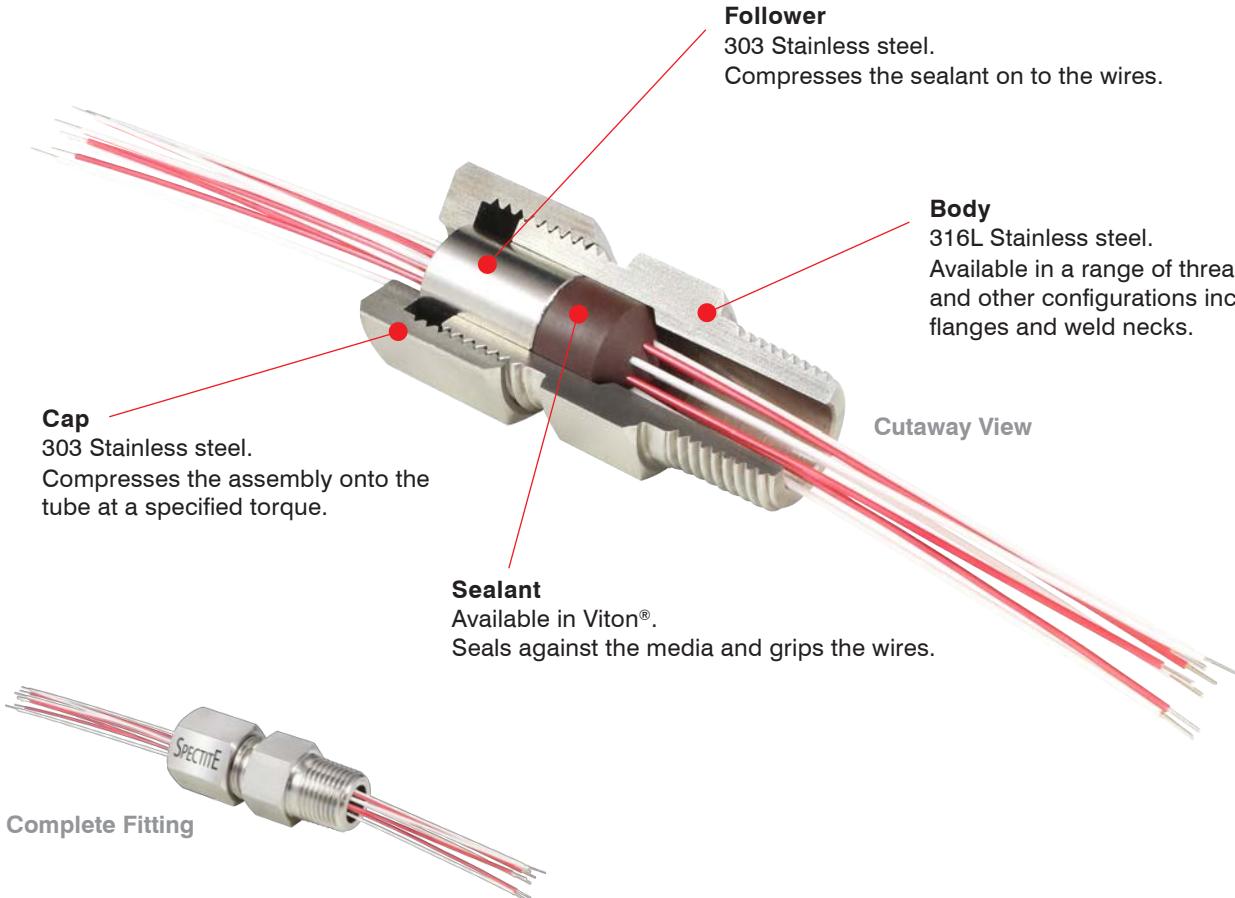
These feedthroughs are designed for use with bearing sensors, sealing individual sensor or instrumentation wires exiting an oil filled bearing enclosure to prevent oil migrating along the sensor leads.

Common low pressure applications include sealing sensor wires in motors, pumps, generators etc and other types of sensor where they exit a process enclosure.

Series BSF feedthroughs seal insulated wires from 32 AWG (0.2mm) to 20 AWG (0.8mm). There are three body sizes (2 to 4) 1/4", 1/2" and 3/4" process connections with BSPT (conical gas or DIN 2999 'R') and NPT threads along with ISO, SAE and UNF threads as shown in the section 3.

Spectite® feedthroughs are designed for ease of assembly and installation. Elements can be adjusted, removed and replaced when not under pressure or vacuum conditions.

Typical Construction



- Seal on insulated wires
- Immersion length of the element can be easily adjusted
- Three sizes of feedthrough assembly
- Designed for easy installation of wires from 0.5mm to 3.5mm overall diameter

- Guide pressure range: Vacuum up to 3 bar
- Temperature range: -40°C to +225°C
- 316L Stainless steel wetted parts (see image above)
- Reusable and replaceable internal components - see page 52

Alternative Configurations



Threaded Extension (B Cap)

Allows the gland to be terminated into the process as well as to a terminal head or conduit at the opposite end to the process. See section 4 for details.



Weld Neck

Supplied without thread for permanent installation into the process by welding. Specify as 'WELD' for the thread size in the order code.



Flanges

For termination to a mating flange within the process, see section 5 for details of the flanges available as standard.

Section 1 - Series BSF Sealants

Sealant Material	Code	Colour	Example	Operating Temperature Range	Re-usable	Material definition and properties
Viton®	V	Brown		-40°C to +225°C (intermittently to +285°C)	✓	Fluoroelastomer. Resists hydrocarbons, corrosive chemicals and petroleum. Solvent, acid and base resistant. Low permeation rate. Mechanically robust at high temperatures.

Section 2 - Body Size, Pressure Guide¹ and available Bore Sizes for BSPT, BSPP and NPT Threads²

Series BSF - Insulated wires

Body Size		No. of Elements	Size 2 (1/4")	No. of Elements	Size 3 (1/2")	No. of Elements	Size 4 (3/4")
Sealant			V		V		V
Wire Size ³			<i>The maximum guide pressure value (in bar) at 20°C is shown for each sealant material according to element size¹. These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.</i>				
Minimum	Maximum		2 to 4	3 bar	2 to 8	3 bar	2 to 14
0.5mm	1.5mm						
1.6mm	2.8mm			2 to 4		2 to 8	
2.9mm	3.5mm					2 to 6	
							3 bar

1 The guide pressures shown for each type of sealant are at 20°C. Spectite® feedthroughs from TC Ltd. have been designed to provide an efficient seal on the elements and restrain them from moving under pressure and vacuum. It is good installation practice to provide additional, mechanical restraint to the elements when differential pressure exceeds 50% of the feedthrough guide pressure value at 20°C. With an increase in temperature, a reduction in the maximum guide pressure value can be expected. These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.

2 Other types of process connection are available, see Section 3.

3 The element diameters shown are the common sizes routinely demanded for general industrial applications. Other sizes can be supplied between the minimum and maximum diameters shown.

Section 3 - Series BSF Body Size and available Bore Sizes for all Thread Types - please refer to table for guide pressures in Section 2



Size 2 (1/4" Thread or equivalent)		
Standard Thread Sizes		
1/4" BSPT, 1/4" BSPP, 1/4" NPT		
Alternative Thread Sizes		
M10x1.0, 7/16" UNF-20		
M12x1.5, 1/2" UNF-20		
Standard Fitting		
Fitting with Threaded Cap		
Fitting with Weld Neck		
Fitting with Weld Neck and Threaded Cap		

Size 3 (1/2" Thread or equivalent)		
Standard Thread Sizes		
1/2" BSPT, 1/2" BSPP, 1/2" NPT		
Alternative Thread Sizes		
3/8" BSPT, 3/8" BSPP, 3/8" NPT		
M14x1.5, 7/16" SAE-20, 9/16" UNF-18		
M16x1.5, 1/2" SAE-20, 5/8" UNF-18		
M20x1.5, 9/16" SAE-24, 3/4" UNF-16		
Standard Fitting		
Fitting with Threaded Cap		
Fitting with Weld Neck		
Fitting with Weld Neck and Threaded Cap		

Size 4 (3/4" Thread or equivalent)		
Standard Thread Sizes		
3/4" BSPT, 3/4" BSPP, 3/4" NPT		
Alternative Thread Sizes		
M22x1.5, 3/4" SAE-16, 7/8" UNF-14		
M24x2.0, 7/8" SAE-14, 1" UNF-14		
Standard Fitting		
Fitting with Threaded Cap		
Fitting with Weld Neck		
Fitting with Weld Neck and Threaded Cap		

Please note: The overall length will vary slightly depending on the sealant used and the tube size.

Section 4 - Series BSF Cap Configuration

Style A	Description	Style B	Description
	Standard Fitting with single thread for direct mounting into process.		Standard Fitting with a Style B threaded extension for conduit/terminal head or enclosure connection. The thread form is the same as the process thread unless otherwise specified. <i>If a different thread form is required, please specify after the 'B' in the order code, for example: BSF2 - 1/4" BSPP - 0.5 - V - B NPT</i> <i>If a B cap is used with a weld neck fitting, then the thread form must be specified.</i>

Section 5 - Series BSF - Optional Flange Details

Style	Example	Part Code	Maximum Compatible Body Size	Outside Diameter	Thickness
KF FLANGE		KF16	Size 2	30mm	5.08mm
		KF25	Size 3	40mm	5.08mm
		KF40	Size 5	55mm	5.08mm
		KF50	Size 5	75mm	5.08mm
CF FLANGE		DN16CF	Size 3	33.8mm	7.6mm
		DN25CF	Size 4	54.0mm	11.9mm
		DN35-40CF	Size 5	69.9mm	12.7mm
		DN50CF	Size 5	85.7mm	16.0mm
		DN63CF	Size 5	114.3mm	17.3mm

All flanges are supplied in 304L stainless steel as standard. Hygienic and Food Grade Flanges are also available - please contact us for further details.

CF Flanges are non-rotatable (fixed) type and comply with ISO3669-2017.


KF Flanges are compatible to the ISO Standard 2861 Specification.

Many other styles of flange available on request (DIN, JIS, ANSI, etc.), contact TC Ltd. for details

Series BSF Torque Settings - Max. values in Nm

Process Connection Size	Sealants
	V
Size 2 (1/4")	3
Size 3 (1/2")	5
Size 4 (3/4")	15

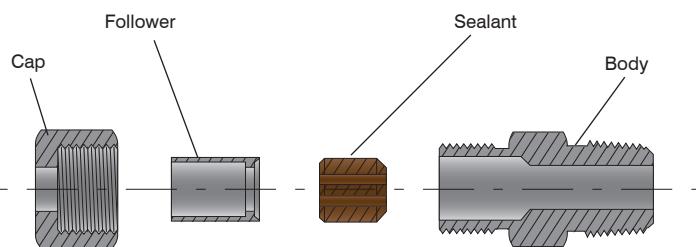Series BSF Schematic



Typical components shown for a BSF Series fitting.

V = Viton®

To convert: ft/lb = Nm x 0.738; Kg/cm = Nm x 10.2.

Series BSF - Order Code Examples

Feedthrough Series	Feedthrough Size (see Section 3)	Process Connection (see Section 3)	Wire Diameter over Insulation (see Section 2)	No. of Elements (see Section 2)	Sealant (see Section 1)	Cap Configuration (see Section 4)	Flange Details (only available with a weld neck)					
BSF	2	-	1/4" BSPT	-	1.5mm	-	2	-	V	-	A	
BSF	3	-	1/2" NPT	-	2.0mm	-	4	-	V	-	B	
BSF	4	-	WELD	-	3.5mm	-	6	-	V	-	A	- KF50

Series ASF Feedthroughs for Autoclave Sensors

These feedthroughs are designed for use within sterilising and composite autoclave applications, sealing multiple sensor or instrumentation wires exiting an enclosure.

Series ASF feedthroughs seal thermocouple pairs insulated in a single shot PTFE cable which is gas, steam and water tight. Available in thermocouple types K, J, T and N.

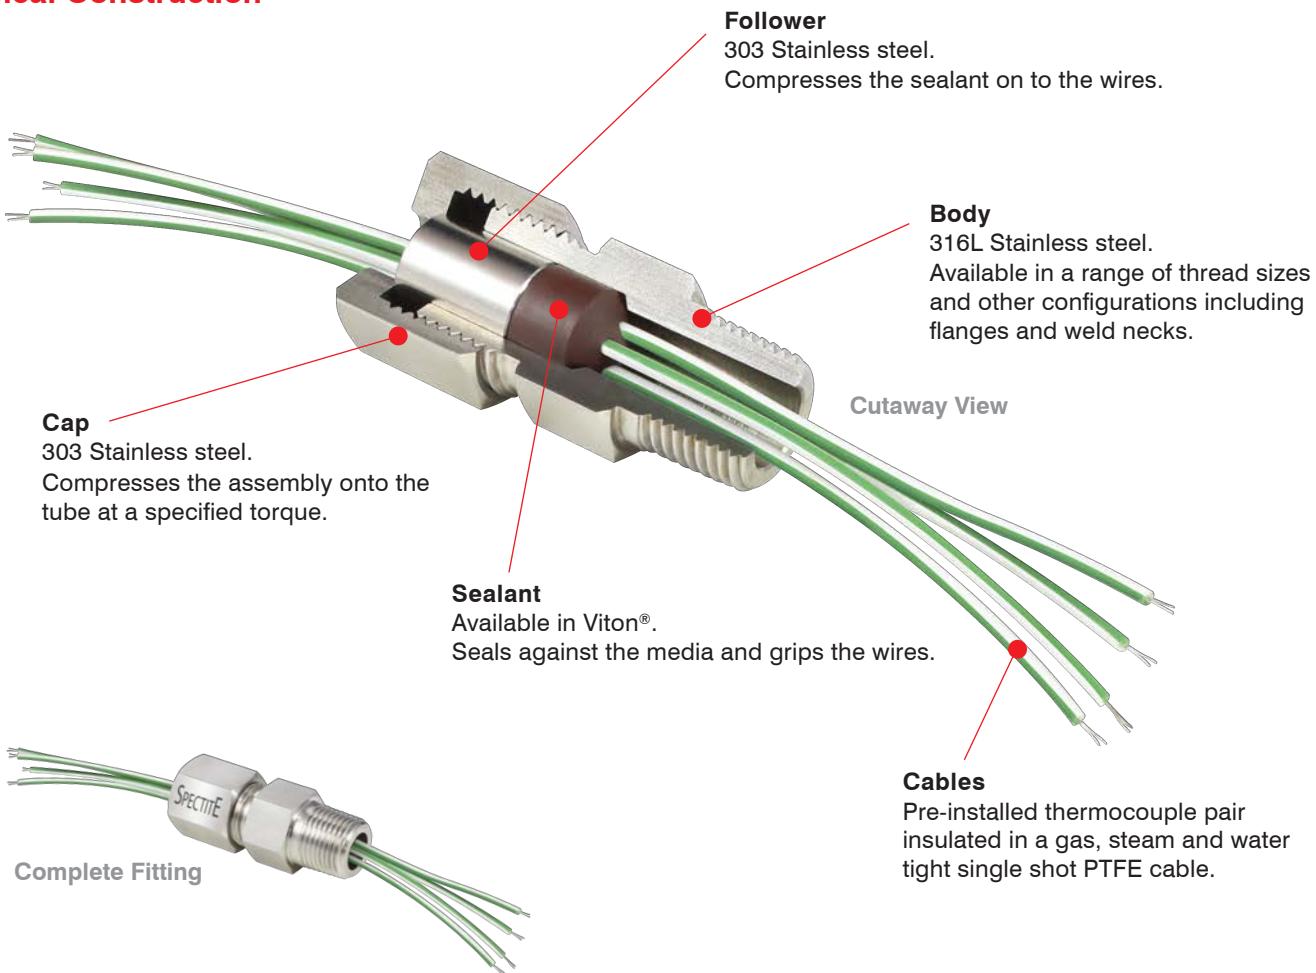
There are three body sizes (2 to 4) 1/4", 1/2" and 3/4" process connections with BSPT (conical gas or DIN 2999

'R') and NPT threads along with ISO, SAE and UNF threads as shown in the table section 3.

Spectite® feedthroughs are designed for ease of assembly and installation. Elements can be adjusted, removed and replaced when not under pressure or vacuum conditions.

The thermocouple pairs are available with or without junctions. Please contact us for further details.

Typical Construction



- Seal on PTFE single shot thermocouple wires
- Immersion length of the element can be easily adjusted
- Three sizes of feedthrough assembly
- Guide pressure range: Vacuum up to 3 bar

- Temperature range: -40°C to +225°C
- 316L Stainless steel wetted parts (see above)
- Reusable and replaceable internal components - see page 52

Alternative Configurations



Threaded Extension (B Cap)

Allows the gland to be terminated into the process as well as to a terminal head or conduit at the opposite end to the process. See section 4 for details.



Weld Neck

Supplied without thread for permanent installation into the process by welding. Specify as 'WELD' for the thread size in the order code.



Flanges

For termination to a mating flange within the process, see section 5 for details of the flanges available as standard.

Section 1 - Series ASF Sealants

Sealant Material	Code	Colour	Example	Operating Temperature Range	Re-usable	Material definition and properties
Viton®	V	Brown		-40°C to +225°C (intermittently to +285°C)	✓	Fluor elastomer. Resists hydrocarbons, corrosive chemicals and petroleum. Solvent, acid and base resistant. Low permeation rate. Mechanically robust at high temperatures.

Section 2 - Body Size, Pressure Guide¹ and available Bore Sizes for BSPT, BSPP and NPT Threads²

Series ASF - Insulated wires

Body Size		No. of Thermocouples	Size 2 (1/4")	No. of Thermocouples	Size 3 (1/2")	No. of Thermocouples	Size 4 (3/4")
Sealant	Conductor		V		V		V
Wire Size Ø ³	Overall	<i>The maximum guide pressure value (in bar) at 20°C is shown for each sealant material according to element size¹. These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.</i>					
0.376mm	2.3mm	1 to 4	3 bar	1 to 8	3 bar	1 to 24	3 bar

1 The guide pressures shown for each type of sealant are at 20°C. Spectite® feedthroughs from TC Ltd. have been designed to provide an efficient seal on the elements and restrain them from moving under pressure and vacuum. It is good installation practice to provide additional, mechanical restraint to the elements when differential pressure exceeds 50% of the feedthrough guide pressure value at 20°C. With an increase in temperature, a reduction in the maximum guide pressure value can be expected. These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.

2 Other types of process connection are available, see Section 4.

3 Each pre-installed element is a single PTFE standard autoclave thermocouple cable - see section 3.

Blank (undrilled) sealants are also available for series ASF feedthroughs. When a blank sealant is required, the word 'Blank' should be inserted in the order code instead of an element diameter. Feedthroughs with blank sealants are not pressure rated.

Section 3 - Pre-installed Cable Details

Illustration	Description	Colour Codes available
	<p>Available in thermocouples types K, J, T and N, this cable comprises a pair of solid thermocouple conductors 1/0.376mm diameter (27AWG) encased in a 'single shot' PTFE insulation (round construction, 2.3mm overall diameter).</p> <p>PTFE 'single shot' cables are gas, steam and water tight making them ideal for autoclave applications.</p> <p>Supplied according to IEC colour codes as standard, although ANSI colours are available on request.</p>	<p>IEC 60584-3</p>
		<p>ANSI MC96.1</p>

Section 4 - Series ASF Body Size and available Bore Sizes for all Thread Types - please refer to table for guide pressures in Section 2


Size 2 (1/4" Thread or equivalent)		
Standard Thread Sizes		
1/4" BSPT, 1/4" BSPP, 1/4" NPT		
Alternative Thread Sizes		
M10x1.0, 7/16" UNF-20		
M12x1.5, 1/2" UNF-20		
Standard Fitting		
Fitting with Threaded Cap		
Fitting with Weld Neck		
Fitting with Weld Neck and Threaded Cap		

Size 3 (1/2" Thread or equivalent)		
Standard Thread Sizes		
1/2" BSPT, 1/2" BSPP, 1/2" NPT		
Alternative Thread Sizes		
3/8" BSPT, 3/8" BSPP, 3/8" NPT		
M14x1.5, 7/16" SAE-20, 9/16" UNF-18		
M16x1.5, 1/2" SAE-20, 5/8" UNF-18		
M20x1.5, 9/16" SAE-24, 3/4" UNF-16		
Standard Fitting		
Fitting with Threaded Cap		
Fitting with Weld Neck		
Fitting with Weld Neck and Threaded Cap		

Size 4 (3/4" Thread or equivalent)		
Standard Thread Sizes		
3/4" BSPT, 3/4" BSPP, 3/4" NPT		
Alternative Thread Sizes		
M22x1.5, 3/4" SAE-16, 7/8" UNF-14		
M24x2.0, 7/8" SAE-14, 1" UNF-14		
Standard Fitting		
Fitting with Threaded Cap		
Fitting with Weld Neck		
Fitting with Weld Neck and Threaded Cap		

Please note: The overall length will vary slightly depending on the sealant used and the tube size.

Section 5 - Series ASF Cap Configuration

Style A	Description	Style B	Description
	Standard Fitting with single thread for direct mounting into process.		<p>Standard Fitting with a Style B threaded extension for conduit/terminal head or enclosure connection. The thread form is the same as the process thread unless otherwise specified.</p> <p>If a different thread form is required, please specify after the 'B' in the order code, for example: ASF2 - 1/4" BSPT - K-IEC - 3 - V - B NPT</p> <p>If a B cap is used with a weld neck fitting, then the thread form must be specified.</p>

Section 6 - Series ASF - Optional Flange Details

Style	Example	Part Code	Maximum Compatible Body Size	Outside Diameter	Thickness
KF FLANGE		KF16	Size 2	30mm	5.08mm
		KF25	Size 3	40mm	5.08mm
		KF40	Size 5	55mm	5.08mm
		KF50	Size 5	75mm	5.08mm
CF FLANGE		DN16CF	Size 3	33.8mm	7.6mm
		DN25CF	Size 4	54.0mm	11.9mm
		DN35-40CF	Size 5	69.9mm	12.7mm
		DN50CF	Size 5	85.7mm	16.0mm
		DN63CF	Size 5	114.3mm	17.3mm

All flanges are supplied in 304L stainless steel as standard. Hygienic and Food Grade Flanges are also available - please contact us for further details.

CF Flanges are non-rotatable (fixed) type and comply with ISO3669-2017.


KF Flanges are compatible to the ISO Standard 2861 Specification.

Many other styles of flange available on request (DIN, JIS, ANSI, etc.), contact TC Ltd. for details.

Series ASF Torque Settings - Max. values in Nm

Process Connection Size	Sealants	
	V	
Size 2 (1/4")	3	
Size 3 (1/2")	5	
Size 4 (3/4")	15	

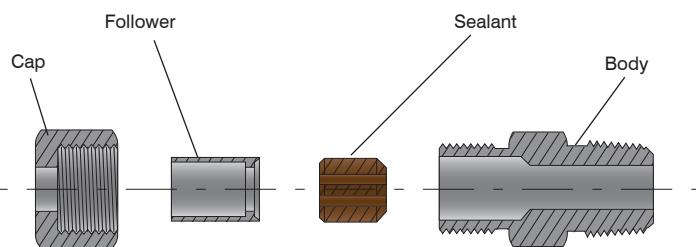Series ASF Schematic



Typical components shown for an ASF Series fitting.

V = Viton®

To convert: ft/lb = Nm x 0.738; Kg/cm = Nm x 10.2.

Series ASF - Order Code Examples

Feedthrough Series	Feedthrough Size (see Section 4)	Process Connection (see Section 4)	Thermocouple Type and Colour Code	No. of Thermocouples	Sealant	Cap Style (see Section 5)	Wire Length CAP SIDE (specify to nearest 100mm, minimum 500mm)	Wire Length PROCESS SIDE (specify to nearest 100mm, minimum 500mm)	Flange Details (only available with a weld neck)
ASF	2	- 1/4" BSPT - K-IEC	- 3 - V - A -	1200mm	- 1200mm				
ASF	3	- 1/2" NPT - T-ANSI	- 4 - V - B -	500mm	- 500mm				
ASF	4	- WELD - K-IEC	- 6 - V - A -	1200mm	- 500mm	- KF50			

Series EF High Voltage Electrode Feedthroughs (2kV)

The integral electrode mounted in these feedthroughs enables specifiers to pass voltages up to 2kV in process enclosures, autoclaves, vacuum furnaces and reactor vessels to power heaters, electric motors and other devices needing high power supply.

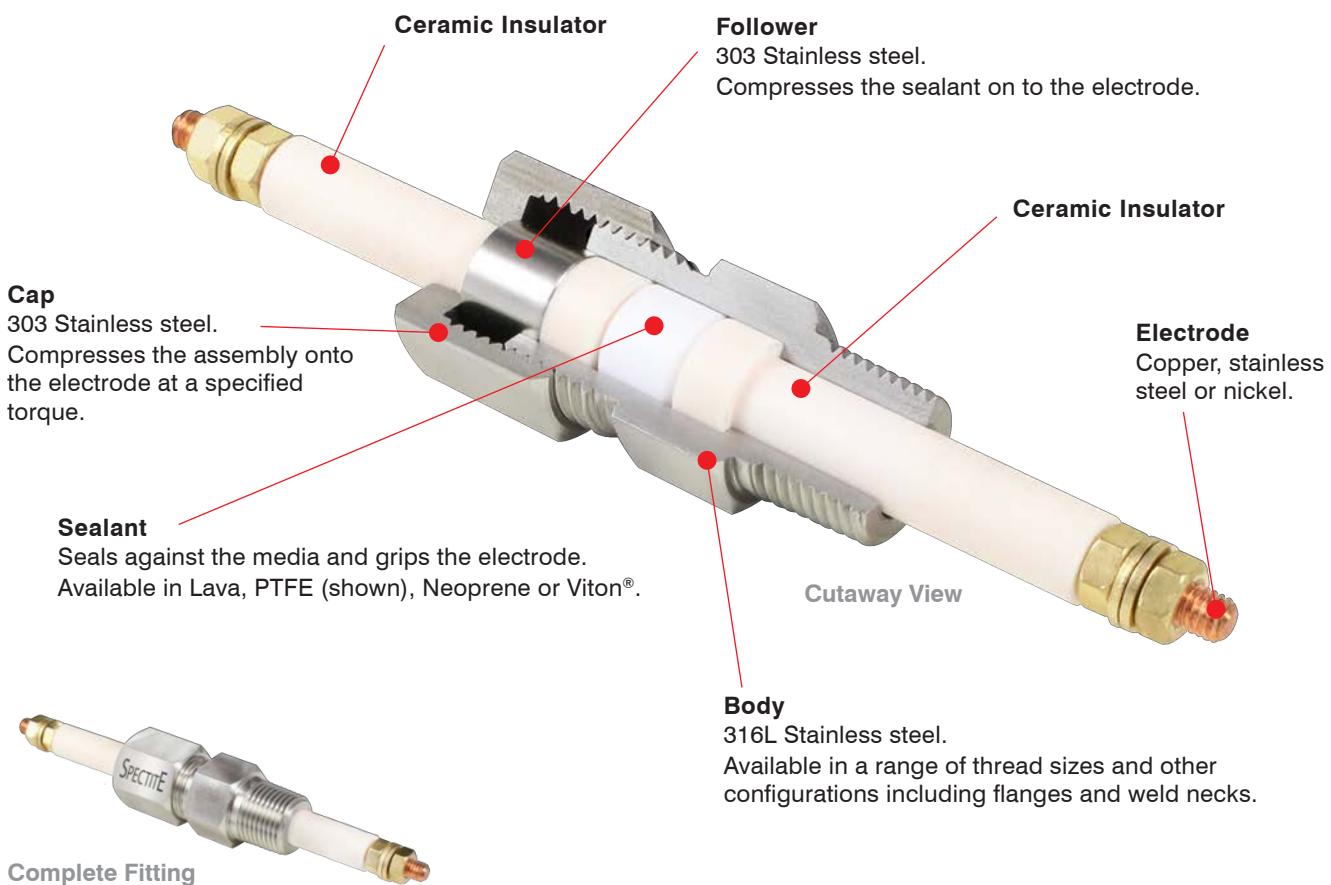
Feedthroughs are available with three sizes of copper electrodes rated 40A, 100A and 200A at 2kV maximum. Stainless steel and nickel electrodes, that have a lower current rating than copper electrodes, can be specified

instead of copper. These are often used when temperatures exceed 380°C.

Feedthroughs with copper electrodes have brass nuts and washers. Stainless steel nuts and washers are fitted to stainless steel and nickel electrodes.

Series EF sealed electrode assemblies are supplied pre-torqued for immediate installation. Integral insulators are made from ceramic.

Typical Construction




Key Features

- Integral Ceramic insulators
- Copper, stainless steel or nickel electrodes
- Three sizes of feedthrough assembly
- Rated for use at 2kV at up to 200A
- Guide pressure range: Vacuum up to 600 bar
- Choice of 3 sealant materials
- Temperature range:
 - 200°C to +380°C (copper electrode)
 - 200°C to +870°C (stainless steel electrode)
 - 200°C to +870°C (nickel electrode)
- Maintainable - internal components replaceable
- Electrodes pre-installed in feedthrough and torqued ready for installation



ATEX / IECEx approved versions available, please contact us for more details

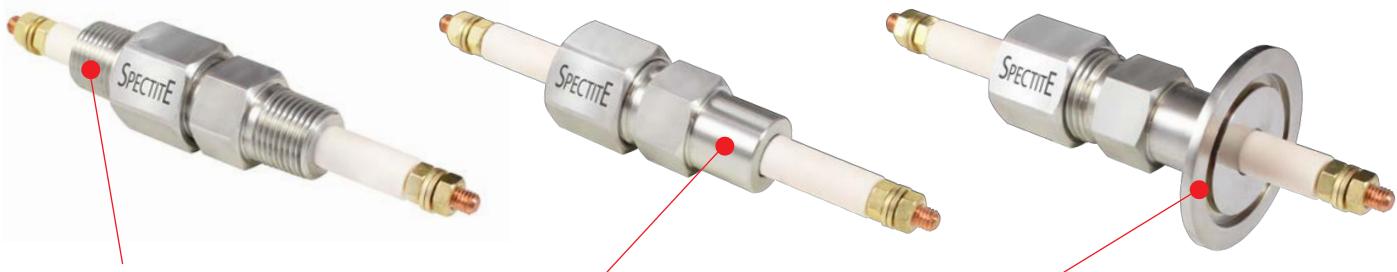Alternative Configurations



Threaded Extension (B Cap)

Allows the gland to be terminated into the process as well as to a terminal head or conduit at the opposite end to the process. See section 4 for details.

Weld Neck

Supplied without thread for permanent installation into the process by welding. Specify as 'WELD' for the thread size in the order code.

Flanges

For termination to a mating flange within the process, see section 5 for details of the flanges available as standard.

Section 1 - Series EF Sealants

Sealant Material	Code	Colour	Example	Operating Temperature Range	Re-usable	Material definition and properties
Viton®	V	Brown		-40°C to +225°C (intermittently to +285°C)	✓	Fluoroelastomer. Resists hydrocarbons, corrosive chemicals and petroleum. Solvent, acid and base resistant. Low permeation rate. Mechanically robust at high temperatures.
PTFE	T	White		-200°C to +250°C	✓	Polytetrafluoroethylene. FDA approved grade to Title 21-CFR 17.1550 and is approved to US Pharmacopoeia Class VI. Has smooth, non-wetting, hydrophobic surfaces that resist biofilm buildup and the lowest coefficient of friction of any solid material. Low thermal transfer.
Lava	L	Grey Stone		-200°C to +870°C	✗	Natural Magnesium Silicate (Soapstone, Steatite or Rock Talc). Crushes to a powder when compressed. Hygroscopic. Porous to light gases. Unsuitable for use with liquid media and in most vacuum applications.

Other sealant materials may be specified, usually for the individual special requirements of particular applications. Please contact TC Ltd. for assistance.

Section 2 - Body Size, Pressure Guide¹ and available Bore Sizes for BSPT, BSPP and NPT Threads²

Series EF - Maximum voltage rating 2kV

Body Size			Size 2 (1/4")			Size 3 (1/2")			Size 4 (3/4")		
Sealant			L	T	V	L	T	V	L	T	V
Voltage Rating			2kV			2kV			2kV		
Electrode Material	Electrode Current Ratings	Electrode dia. (mm)	The table indicates the available electrode sizes for each feedthrough body size. The maximum guide pressure value (in bar) at 20°C is shown for each sealant material according to electrode size ¹ . These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.								
Copper 316 Stainless Steel Nickel	40A 10A 15A	3.2	600	350	550						
Copper 316 Stainless Steel Nickel	100A 15A 40A	6.35				450	150	400			
Copper 316 Stainless Steel Nickel	200A 30A 80A	12.7							200	150	150

¹ The guide pressures shown for each type of sealant are at 20°C. Spectite® feedthroughs from TC Ltd. have been designed to provide an efficient seal on the electrode and restrain them from moving under pressure and vacuum. It is good installation practice to provide additional, mechanical restraint to the electrode when differential pressure exceeds 50% of the feedthrough guide pressure value at 20°C. With an increase in temperature, a reduction in the maximum guide pressure value can be expected. These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.

² Other types of process connection are available, see Section 3.

Section 3 - Series EF Body Size and available Bore Sizes for all Thread Types - please refer to table for guide pressures in Section 2



Size 2 (1/4" Thread or equivalent)	
Standard Thread Sizes	Electrode Diameter
1/4" BSPT, 1/4" BSPP, 1/4" NPT	
Alternative Thread Sizes	
M10x1.0, 7/16" UNF-20	3.2mm
M12x1.5, 1/2" UNF-20	
Standard Fitting	
Fitting with Threaded Cap	
Fitting with Weld Neck	
Fitting with Weld Neck and Threaded Cap	

Size 3 (1/2" Thread or equivalent)	
Standard Thread Sizes	Electrode Diameter
1/2" BSPT, 1/2" BSPP, 1/2" NPT	
Alternative Thread Sizes	
3/8" BSPT, 3/8" BSPP, 3/8" NPT	6.35mm
M14x1.5, 7/16" SAE-20, 9/16" UNF-18	
M16x1.5, 1/2" SAE-20, 5/8" UNF-18	
M20x1.5, 9/16" SAE-24, 3/4" UNF-16	
Standard Fitting	
Fitting with Threaded Cap	
Fitting with Weld Neck	
Fitting with Weld Neck and Threaded Cap	

Size 4 (3/4" Thread or equivalent)	
Standard Thread Sizes	Electrode Diameter
3/4" BSPT, 3/4" BSPP, 3/4" NPT	
Alternative Thread Sizes	
M22x1.5, 3/4" SAE-16, 7/8" UNF-14	12.7mm
M24x2.0, 7/8" SAE-14, 1" UNF-14	
Standard Fitting	
Fitting with Threaded Cap	
Fitting with Weld Neck	
Fitting with Weld Neck and Threaded Cap	

Please note: The overall length will vary slightly depending on the sealant used and the tube size.

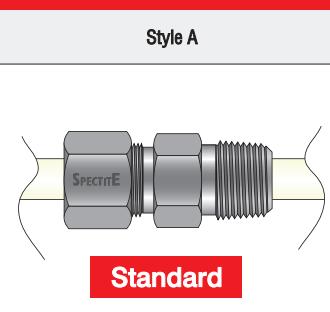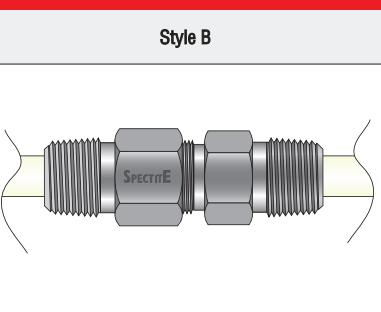Section 4 - Series EF Cap Configuration

Style A	Description	Style B	Description
	Standard Fitting with single thread for direct mounting into process.		<p>Standard Fitting with a Style B threaded extension for conduit/terminal head or enclosure connection. The thread form is the same as the process thread unless otherwise specified.</p> <p>If a different thread form is required, please specify after the 'B' in the order code, for example: EF3 - 1/2" BSPT - CU - L - B NPT</p> <p>If a B cap is used with a weld neck fitting, then the thread form must be specified.</p>

Section 5 - Series EF - Optional Flange Details

Style	Example	Part Code	Maximum Compatible Body Size	Outside Diameter	Thickness
KF FLANGE		KF16	Size 2	30mm	5.08mm
		KF25	Size 3	40mm	5.08mm
		KF40	Size 5	55mm	5.08mm
		KF50	Size 5	75mm	5.08mm
CF FLANGE		DN16CF	Size 3	33.8mm	7.6mm
		DN25CF	Size 4	54.0mm	11.9mm
		DN35-40CF	Size 5	69.9mm	12.7mm
		DN50CF	Size 5	85.7mm	16.0mm
		DN63CF	Size 5	114.3mm	17.3mm

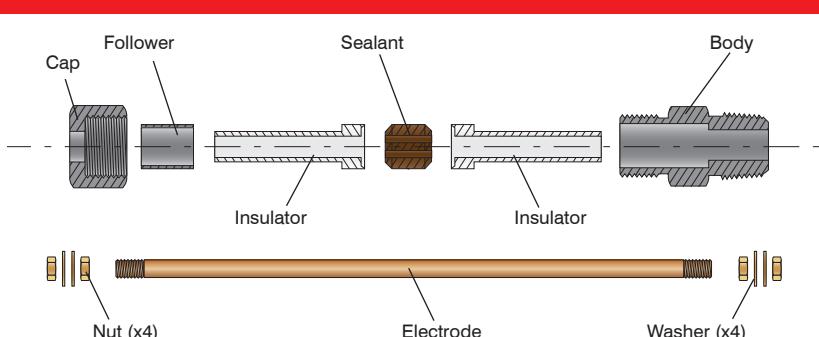
All flanges are supplied in 304L stainless steel as standard. Hygienic and Food Grade Flanges are also available - please contact us for further details.

CF Flanges are non-rotatable (fixed) type and comply with ISO3669-2017.

KF Flanges are compatible to the ISO Standard 2861 Specification.

Many other styles of flange available on request (DIN, JIS, ANSI, etc.), contact TC Ltd. for details

Series EF Schematic



Typical components shown for an EF Series fitting.

Series EF - Order Code Examples

Feedthrough Series	Feedthrough Size (see Section 3)	Process Connection (see Section 3)	Electrode (CU, 316 or NI)	Sealant (see Section 1)	Cap Configuration (see Section 4)	Flange Details (only available with a weld neck)
EF	2	1/4" BSPT	CU	V	A	
EF	2	1/4" BSPT	316	L	B	
EF	2	M12 x 1.5	CU	T	B	
EF	4	WELD	NI	L	B	KF50

Series EFT High Voltage Electrode Feedthroughs (8kV) with PTFE Insulator

The integral electrode mounted in these feedthroughs enables specifiers to pass voltages up to 8kV in process enclosures, autoclaves, vacuum furnaces and reactor vessels to power heaters, electric motors and other devices needing high power supply.

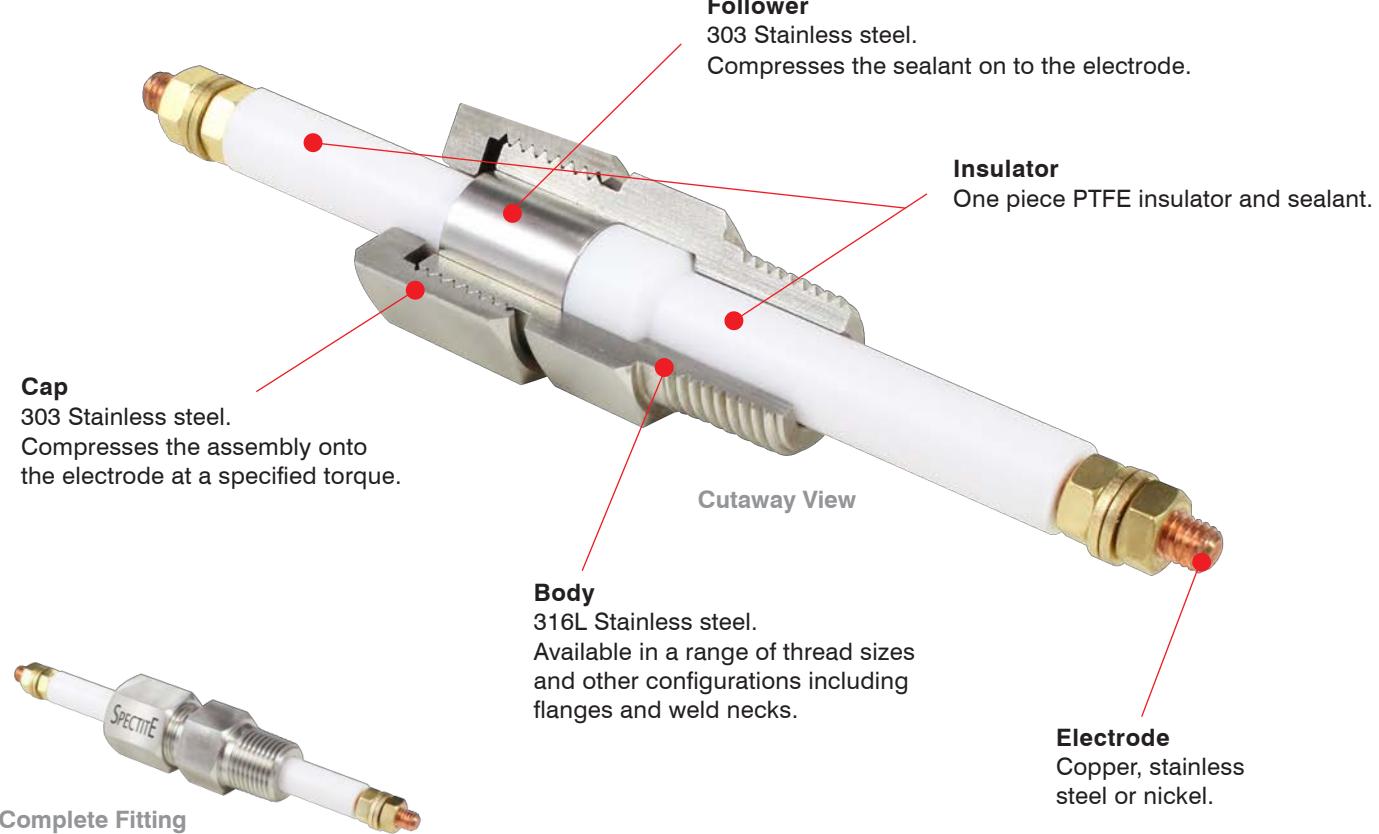
Feedthroughs are available with four sizes of copper electrodes rated 40A, 100A & 200A at 8kV maximum. Stainless steel and nickel electrodes can also be specified.

Feedthroughs with copper electrodes have brass nuts and washers. Stainless steel nuts and washers are fitted to stainless steel and nickel electrodes.

Series EFT sealed electrode assemblies are supplied pre-torqued for immediate installation. Integral insulators are made from PTFE.

PTFE is resistant to most known chemicals and oils.

Typical Construction



- Integral one piece PTFE insulator and sealant
- Copper, stainless steel or nickel electrodes
- Four sizes of feedthrough assembly
- Rated maximum 8kV at up to 200A
- Guide pressure range: Vacuum up to 150 bar

- Temperature range: -185°C to +230°C
- 316L Stainless steel body, 303 internal follower and cap; PTFE insulator
- Electrodes pre-installed in feedthrough and torqued ready for installation

Alternative Configurations



Threaded Extension (B Cap)

Allows the gland to be terminated into the process as well as to a terminal head or conduit at the opposite end to the process. See section 3 for details.

Weld Neck

Supplied without thread for permanent installation into the process by welding. Specify as 'WELD' for the thread size in the order code.

Flanges

For termination to a mating flange within the process, see section 4 for details of the flanges available as standard.

Section 1 - Body Size, Pressure Guide¹ and available Bore Sizes for BSPT, BSPP and NPT Threads²

Series EFT - Maximum voltage rating 8kV

Body Size			Size 1 (1/8")	Size 2 (1/4")	Size 3 (1/2")	Size 4 (3/4")
Insulator / Sealant			PTFE	PTFE	PTFE	PTFE
Voltage Rating			2kV	8kV	8kV	8kV
Electrode Material	Electrode Current Rating	Electrode dia. (mm)	The table indicates the available electrode sizes for each feedthrough body size. The maximum guide pressure value (in bar) at 20°C is shown for each sealant material according to electrode size ¹ . These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.			
Copper 316 Stainless Steel Nickel	40A 10A 15A	3.2	150			
Copper 316 Stainless Steel Nickel	40A 10A 15A	3.2		80		
Copper 316 Stainless Steel Nickel	100A 15A 40A	6.35			80	
Copper 316 Stainless Steel Nickel	200A 30A 80A	12.7				40

¹ The guide pressures shown for each type of sealant are at 20°C. Spectite® feedthroughs from TC Ltd. have been designed to provide an efficient seal on the electrode and restrain them from moving under pressure and vacuum. It is good installation practice to provide additional, mechanical restraint to the electrode when differential pressure exceeds 50% of the feedthrough guide pressure value at 20°C. With an increase in temperature, a reduction in the maximum guide pressure value can be expected. These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.

² Other types of process connection are available, see Section 3.

Section 2 -Series EFT Body Size and available Bore Sizes for all Thread Types - please refer to table for guide pressures in Section 1



Size 1 (1/8" Thread or equivalent)	
Standard Thread Sizes	Electrode Diameter
1/8" BSPT, 1/8" BSPP, 1/8" NPT	3.2mm
Alternative Thread Sizes M8x1.0, 3/8" UNF-24 M10x1.0, 7/16" UNF-24	
Standard Fitting	
Fitting with Threaded Cap	
Fitting with Weld Neck	
Fitting with Weld Neck and Threaded Cap	

Size 2 (1/4" Thread or equivalent)	
Standard Thread Sizes	Electrode Diameter
1/4" BSPT, 1/4" BSPP, 1/4" NPT	3.2mm
Alternative Thread Sizes M10x1.0, 7/16" UNF-20 M12x1.5, 1/2" UNF-20	
Standard Fitting	
Fitting with Threaded Cap	
Fitting with Weld Neck	
Fitting with Weld Neck and Threaded Cap	

Size 3 (1/2" Thread or equivalent)	
Standard Thread Sizes	Electrode Diameter
1/2" BSPT, 1/2" BSPP, 1/2" NPT	6.35mm
Alternative Thread Sizes 3/8" BSPT, 3/8" BSPP, 3/8" NPT M14x1.5, 7/16" SAE-20, 9/16" UNF-18 M16x1.5, 1/2" SAE-20, 5/8" UNF-18 M20x1.5, 9/16" SAE-24, 3/4" UNF-16	
Standard Fitting	
Fitting with Threaded Cap	
Fitting with Weld Neck	
Fitting with Weld Neck and Threaded Cap	

Size 4 (3/4" Thread or equivalent)	
Standard Thread Sizes	Electrode Diameter
3/4" BSPT, 3/4" BSPP, 3/4" NPT	12.7mm
Alternative Thread Sizes M22x1.5, 3/4" SAE-16, 7/8" UNF-14 M24x2.0, 7/8" SAE-14, 1" UNF-14	
Standard Fitting	
Fitting with Threaded Cap	
Fitting with Weld Neck	
Fitting with Weld Neck and Threaded Cap	

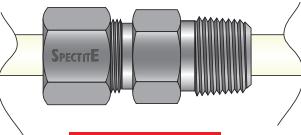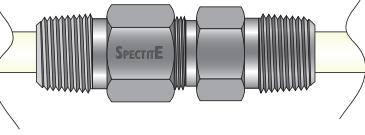Section 3 - Series EFT Cap Configuration

Style A	Description	Style B	Description
	Standard Fitting with single thread for direct mounting into process.		<p>Standard Fitting with a Style B threaded extension for conduit/terminal head or enclosure connection. The thread form is the same as the process thread unless otherwise specified.</p> <p>If a different thread form is required, please specify after the 'B' in the order code, for example: EFT3 - 1/2" BSPT - CU - B NPT</p> <p>If a B cap is used with a weld neck fitting, then the thread form must be specified.</p>

Section 4 - Series EFT - Optional Flange Details

Style	Example	Part Code	Maximum Compatible Body Size	Outside Diameter	Thickness
KF FLANGE		KF16	Size 2	30mm	5.08mm
		KF25	Size 3	40mm	5.08mm
		KF40	Size 5	55mm	5.08mm
		KF50	Size 5	75mm	5.08mm
CF FLANGE		DN16CF	Size 3	33.8mm	7.6mm
		DN25CF	Size 4	54.0mm	11.9mm
		DN35-40CF	Size 5	69.9mm	12.7mm
		DN50CF	Size 5	85.7mm	16.0mm
		DN63CF	Size 5	114.3mm	17.3mm

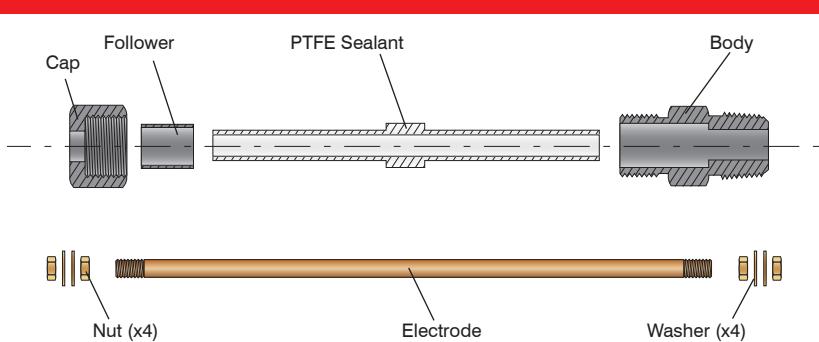
All flanges are supplied in 304L stainless steel as standard. Hygienic and Food Grade Flanges are also available - please contact us for further details.

CF Flanges are non-rotatable (fixed) type and comply with ISO3669-2017.

KF Flanges are compatible to the ISO Standard 2861 Specification.

Many other styles of flange available on request (DIN, JIS, ANSI, etc.), contact TC Ltd. for details

Series EFT Schematic



Typical components shown for an EFT Series fitting.

Series EFT - Order Code Examples

Feedthrough Series	Feedthrough Size (see Section 2)	Process Connection (see Section 2)	Electrode (CU, 316 or NI)	Sealant (Integral PTFE only)	Cap Configuration (see Section 3)	Flange Details (only available with a weld neck)
EFT	2	1/4" BSPT	CU	T	A	
EFT	2	1/4" BSPT	316	T	B	
EFT	2	M12 x 1.5	CU	T	B	
EFT	4	WELD	NI	T	B	KF50

Series EFP High Voltage Electrode Feedthroughs (8kV) with PEEK Insulator

The integral electrode mounted in these feedthroughs enables specifiers to pass voltages up to 8kV in process enclosures, autoclaves, vacuum furnaces and reactor vessels to power heaters, electric motors and other devices needing high power supply.

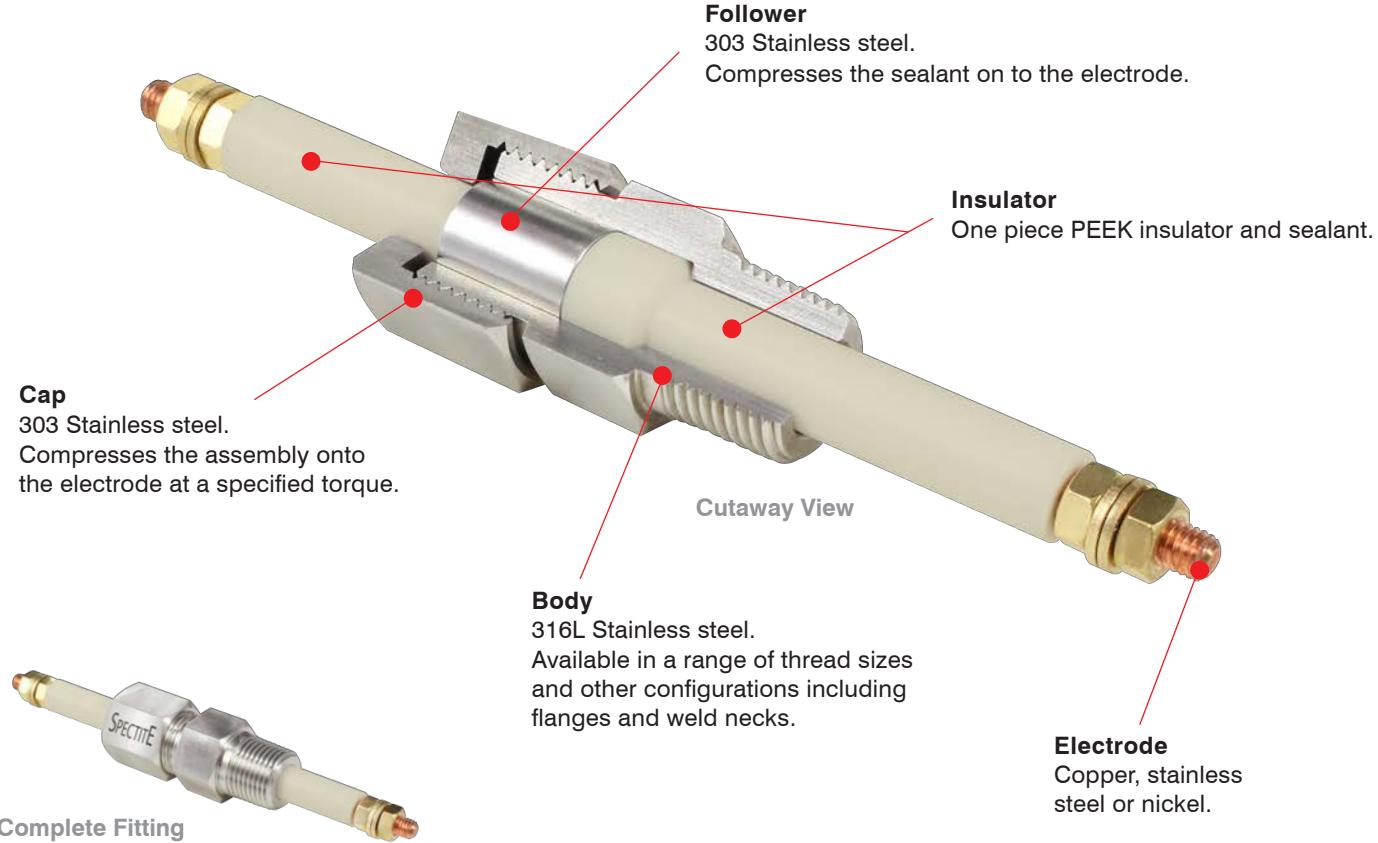
Feedthroughs are available with three sizes of copper electrodes rated 40A, 100A & 200A at 8kV maximum. Stainless steel and nickel electrodes can also be specified.

Feedthroughs with copper electrodes have brass nuts and washers. Stainless steel nuts and washers are fitted to stainless steel and nickel electrodes.

Series EFP sealed electrode assemblies are supplied pre-torqued for immediate installation. Integral insulators are made from PEEK.

PEEK (Polyetheretherketone) is an engineering plastic used in environments such as aerospace, oil and gas, food processing, and semiconductor manufacture.

Typical Construction



- Integral one piece PEEK insulator and sealant
- Copper, stainless steel or nickel electrodes
- Three sizes of feedthrough assembly
- Rated for use at 8kV at up to 200A
- Guide pressure range: Vacuum up to 500 bar

- Temperature range: -50°C to +250°C
- 316L Stainless steel body, 303 internal follower and cap; PEEK insulator
- Electrodes pre-installed in feedthrough and torqued ready for installation

Alternative Configurations



Threaded Extension (B Cap)

Allows the gland to be terminated into the process as well as to a terminal head or conduit at the opposite end to the process. See section 3 for details.

Weld Neck

Supplied without thread for permanent installation into the process by welding. Specify as 'WELD' for the thread size in the order code.

Flanges

For termination to a mating flange within the process, see section 4 for details of the flanges available as standard.

Section 1 - Body Size, Pressure Guide¹ and available Bore Sizes for BSPT, BSPP and NPT Threads² Series EFP - Maximum voltage rating 8kV

			Body Size	Size 2 (1/4")	Size 3 (1/2")	Size 4 (3/4")
			Insulator / Sealant	PEEK	PEEK	PEEK
			Voltage Rating	8kV	8kV	8kV
Electrode Material	Electrode Current Ratings	Electrode dia. (mm)	<p><i>The table indicates the available electrode sizes for each feedthrough body size. The maximum guide pressure value (in bar) at 20°C is shown for each sealant material according to electrode size¹. These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.</i></p>			
Copper 316 Stainless Steel Nickel	40A 10A 15A	3.2	500			
Copper 316 Stainless Steel Nickel	100A 15A 40A	6.35		280		
Copper 316 Stainless Steel Nickel	200A 30A 80A	12.7				220

¹ The guide pressures shown for each type of sealant are at 20°C. Spectite® feedthroughs from TC Ltd. have been designed to provide an efficient seal on the electrode and restrain them from moving under pressure and vacuum. It is good installation practice to provide additional, mechanical restraint to the electrode when differential pressure exceeds 50% of the feedthrough guide pressure value at 20°C. With an increase in temperature, a reduction in the maximum guide pressure value can be expected. These ratings are a guide and the suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.

² Other types of process connection are available, see Section 3.



Section 2 -Series EFP Body Size and available Bore Sizes for all Thread Types - please refer to table for guide pressures in Section 1

Size 2 (1/4" Thread or equivalent)	
Standard Thread Sizes	Electrode Diameter
1/4" BSPT, 1/4" BSPP, 1/4" NPT	
Alternative Thread Sizes	
M10x1.0, 7/16" UNF-20	3.2mm
M12x1.5, 1/2" UNF-20	
Standard Fitting	
Fitting with Threaded Cap	
Fitting with Weld Neck	
Fitting with Weld Neck and Threaded Cap	

Size 3 (1/2" Thread or equivalent)	
Standard Thread Sizes	Electrode Diameter
1/2" BSPT, 1/2" BSPP, 1/2" NPT	
Alternative Thread Sizes	
3/8" BSPT, 3/8" BSPP, 3/8" NPT	6.35mm
M14x1.5, 7/16" SAE-20, 9/16" UNF-18	
M16x1.5, 1/2" SAE-20, 5/8" UNF-18	
M20x1.5, 9/16" SAE-24, 3/4" UNF-16	
Standard Fitting	
Fitting with Threaded Cap	
Fitting with Weld Neck	
Fitting with Weld Neck and Threaded Cap	

Size 4 (3/4" Thread or equivalent)	
Standard Thread Sizes	Electrode Diameter
3/4" BSPT, 3/4" BSPP, 3/4" NPT	
Alternative Thread Sizes	
M22x1.5, 3/4" SAE-16, 7/8" UNF-14	12.7mm
M24x2.0, 7/8" SAE-14, 1" UNF-14	
Standard Fitting	
Fitting with Threaded Cap	
Fitting with Weld Neck	
Fitting with Weld Neck and Threaded Cap	

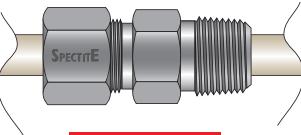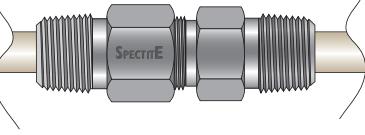Section 3 - Series EFP Cap Configuration

Style A	Description	Style B	Description
	Standard Fitting with single thread for direct mounting into process.		<p>Standard Fitting with a Style B threaded extension for conduit/terminal head or enclosure connection. The thread form is the same as the process thread unless otherwise specified.</p> <p>If a different thread form is required, please specify after the 'B' in the order code, for example: EFP3 - 1/2" BSPT - CU - B NPT</p> <p>If a B cap is used with a weld neck fitting, then the thread form must be specified.</p>

Section 4 - Series EFP - Optional Flange Details

Style	Example	Part Code	Maximum Compatible Body Size	Outside Diameter	Thickness
KF FLANGE		KF16	Size 2	30mm	5.08mm
		KF25	Size 3	40mm	5.08mm
		KF40	Size 5	55mm	5.08mm
		KF50	Size 5	75mm	5.08mm
CF FLANGE		DN16CF	Size 3	33.8mm	7.6mm
		DN25CF	Size 4	54.0mm	11.9mm
		DN35-40CF	Size 5	69.9mm	12.7mm
		DN50CF	Size 5	85.7mm	16.0mm
		DN63CF	Size 5	114.3mm	17.3mm

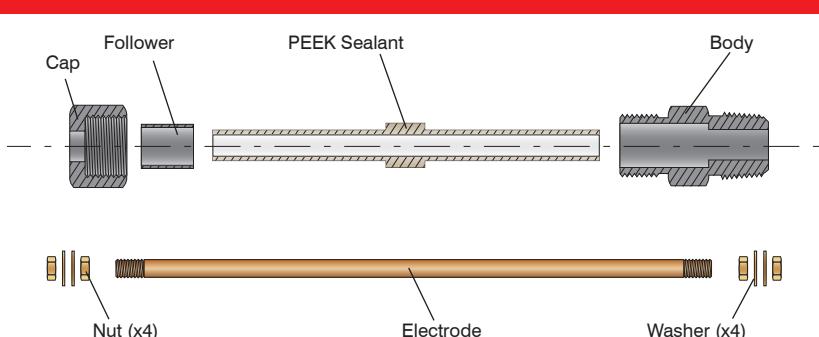
All flanges are supplied in 304L stainless steel as standard. Hygienic and Food Grade Flanges are also available - please contact us for further details.

CF Flanges are non-rotatable (fixed) type and comply with ISO3669-2017.

KF Flanges are compatible to the ISO Standard 2861 Specification.

Many other styles of flange available on request (DIN, JIS, ANSI, etc.), contact TC Ltd. for details

Series EFP Schematic



Typical components shown for an EFP Series fitting.

Series EFP - Order Code Examples

Feedthrough Series	Feedthrough Size (see Section 2)	Process Connection (see Section 2)	Electrode (CU, 316 or NI)	Sealant (Integral PEEK only)	Cap Configuration (see Section 3)	Flange Details (only available with a weld neck)
EFP	2	-	1/4" BSPT	- CU	- P	- A
EFP	2	-	1/4" BSPT	- 316	- P	- B
EFP	2	-	M12 x 1.5	- CU	- P	- B
EFP	4	-	WELD	- NI	- P	- B - KF50

Accessories

RS - Replacement Sealants

For use with PF, MF, PSF, MSF, MSFD, WF, EF, BSF and ASF feedthroughs

Code	Description	Order Code Example	Note
RS	To specify a replacement sealant, please prefix the original order code of the feedthrough assembly for which the part is required by: RS.	RS-PF2-6.0-V RS-MF3-3.0-4-T	Blank (undrilled) sealants are also available. When a blank sealant is required, the word 'Blank' should be inserted in the order code instead of an element diameter. Feedthroughs with blank sealants are not pressure rated.

RP - Set of Replacement Internal Components

For use with PF, MF, PSF, MSF, MSFD, WF, BSF and ASF feedthroughs

Code	Description	Feedthrough Series	Internal Component List	Order Code Examples
RP	To specify a complete set of replacement parts, please prefix the original order code of the feedthrough assembly for which the part is required by: RP for a set of internal components.	PF, BSF and ASF	Follower and sealant	RP-PF2-6.0-V
		MF, PSF, MSF, MSFD	Follower, sealant and seat	RP-MF3-3.0-4-T
		WF	Follower, Seat, 2x insulators and sealant	RP-WFP2-1.0-8-L

RI / RE - Replacement Insulators and Electrodes

For use with EF, EFT and EFP feedthroughs

Code	Description	Feedthrough Series	Internal Component List	Order Code Examples
RI	To specify replacement insulators or electrodes, please prefix the original order code of the feedthrough assembly for which the part is required by: RI for a pair of insulators	EF	Pair of ceramic insulators	RI-EF2
		EFT	Single piece PTFE insulator/sealant	RI-EFT3
		EFP	Single piece PEEK insulator/sealant	RI-EFP4
RE	RE for a replacement electrode (with nuts and washers) available in either copper, stainless steel or nickel - see part code examples	EF, EFT, EFP	Copper (CU), stainless steel (316) or nickel (NI) electrode with nuts and washers	RE-EF2-CU RE-EFT3-SS RE-EFP4-NI

TA - Thread Seal Tape

Code	Description	Order Code	Material	Tape Thickness	Reel Length	Temperature Range
TA	Use of mounting thread seal tapes assists the efficiency of tapered threads in to the process.	TA-PTFE20	PTFE	0.2mm	10 metres	-185°C to +250°C
		TA-PTFE30	PTFE	0.3mm	10 metres	-185°C to +250°C
		TA-PTFE50	PTFE	0.5mm	10 metres	-185°C to +250°C
		TA-GRA20	Graftite™	0.2mm	10 metres	-200°C to +500°C
		TA-GRA30	Graftite™	0.3mm	10 metres	-200°C to +500°C
		TA-GRA50	Graftite™	0.5mm	10 metres	-200°C to +500°C

TL - Thread Lubricant

Code	Description	Order Code	
TL	Applied to feedthrough bodies, followers and caps when a feedthrough is opened so that elements or sealants can be replaced or elements adjusted. Speclube Lubricant is available in handy 10ml bottles with applicator brushes. Order as Speclube Thread Lubricant.	TL-10	

Accessories

RA - Stainless Steel Reducing Adaptors

Code	Diagram	Order Code	Male Thread (T1)	Female Thread (T2)
RA		RA1/2FX1/4MBSP	1/4" BSPT	1/2" BSPP
		RA1/2XF1/4MNPT	1/4" NPT	1/2" NPT
		RA1/2FX1/8MBSP	1/8" BSPT	1/2" BSPP
		RA1/2FX1/8MNPT	1/8" NPT	1/2" NPT
		RA1/4FX1/8MBSPT	1/8" BSPT	1/4" BSPP
		RA1/4FX1/8MNPT	1/8" NPT	1/4" NPT
		RA3/4FX1/2MBSP	1/2" BSPT	3/4" BSPP
		RA3/4FX1/2MNPT	1/2" NPT	3/4" NPT
Ideal for reducing the thread size of fittings to suit a pre-existing entry port.				

RB - Stainless Steel Reducing Bushes

Code	Diagram	Order Code	Male Thread (T1)	Female Thread (T2)
RB		RB1/2MX1/4FBSP	1/2" BSPT	1/4" BSPP
		RB1/2MX1/4NPT	1/2" NPT	1/4" NPT
		RB1/2MX1/8FBSP	1/2" BSPT	1/8" BSPP
		RB1/2MX1/8NPT	1/2" NPT	1/8" NPT
		RB1/4MX1/8FBSP	1/4" BSPT	1/8" BSPP
		RB1/4MX1/8FNPT	1/4" NPT	1/8" NPT
		RB3/4MX1/2FBSP	3/4" BSPT	1/2" BSPP
		RB3/4MX1/2FNPT	3/4" NPT	1/2" NPT
Ideal for increasing the thread size of fittings to suit a pre-existing entry port.				

General Specifications

The technical data and guideline information presented in this publication is provided in good faith; however, no warranty, express or implied, is given whatsoever as to its accuracy and no liability is accepted for any errors or omissions. The suitability of any of the products described herein for a particular application is entirely at the discretion of the purchaser as being the best judge for that particular application.

Spectite® sealed feedthrough assemblies from TC Ltd. have been designed to be easy to install and can be maintained. Sealants and other internal parts are replaceable so that fittings can be re-used over and over again. If elements need replacement or adjustment, the feedthrough cap can be undone - after the pressure or vacuum in the vessel has been released - to allow movement or removal of all or individual elements.

Guide Pressure Values

The pressure and temperature ratings and typical leak rates quoted are given for guidance only. Pressure values vary with temperature and sealant used. With an increase in temperature, a reduction in the maximum guide pressure value can be expected. Contact TC Ltd. for further details. The BSPT and NPT mounting thread guide pressure value is the same or is higher than the feedthrough guide pressure value.

Spectite® feedthroughs from TC Ltd. have been designed to provide an efficient seal on the elements and restrain them from moving under pressure and vacuum. It is good installation practice to provide additional, mechanical restraint to the elements when differential pressure exceeds 50% of the feedthrough guide pressure value at 20°C. (Not applicable to series EF feedthroughs with integral electrodes). Consult TC Ltd. for further guidance on guide pressure values.

Feedthroughs with Graftite, Neoprene, PTFE and Viton sealants are suitable for vacuum applications to 5×10^{-6} torr (6.67 $\times 10^4$ Pa or 6.67×10^{-6} mbar). Lava sealants are not suitable for vacuum applications.

Leak rates

A typical leak rate for Spectite® feedthrough assemblies with Graftite, Neoprene, PTFE and Viton sealants is better than or equal to 1×10^{-6} scc/sec. under 1 Atm. He @ 20°C. (1 Atm. = 9.87×10^4 Pa or 987.2 mbar).

Ordering information

Feedthrough and sealed tube assemblies are specified for ordering by a simple composite description that includes the type of feedthrough, the size of the feedthrough body (defined by the size of the process connection), the size of the element(s) to pass through the feedthrough, the number of elements (not applicable to series PF & PSF for single elements) and the sealant material.

An example of a typical order code for a feedthrough for multiple sensors (8 x 1.5mm dia. probes):

MF3 - 1/2" BSPT - 1.5mm - 8 - T - B

If a feedthrough is required with a cap with a threaded conduit extension, the word Cap and the threadform required is added to the end of the order code, as shown in shadow in the example above.

Order code arrangements for feedthroughs for multiple wires and with integral electrodes include additional parameters. Further details are given in the order code information for each series.

For assistance with specifying and ordering Spectite® feedthrough assemblies, particularly where there are high temperatures, high pressures or difficult application environments, contact TC Ltd.

Replacement parts and thread lubricant

Sealants and other internal components for Spectite® feedthrough assemblies are available as replacement parts. To specify the component needed, prefix the order code of the feedthrough assembly for which the part is required by: **RS** for a replacement sealant; **RP** for a set of internal components, (i) for series MF feedthroughs comprising follower, sealant and seat, or (ii) for series WF feedthroughs comprising two internal insulators and sealant; **RI** for a pair of insulators for series EF feedthroughs; **RE** for a replacement electrode (with nuts and washers) for series EF.

A lubricant is applied to feedthrough bodies, followers and caps during assembly in our factory. It helps to prevent these component parts from binding and minimises friction between mating surfaces. Each time a feedthrough assembly is opened so that elements or sealants can be replaced or elements adjusted, re-application of lubricant is recommended. Speclube Lubricant is available from TC Ltd. in handy 10ml bottles with applicator brushes. Order as **Speclube Thread Lubricant**.

Process connections

Feedthrough bodies can be specified with a choice of threaded process connections. Feedthroughs with the common tapered threadforms, BSPT (conical gas thread or 'R' thread) to BS21, DIN 2999 ISO 7/1 & JIS B0203; and NPT (national pipe tapered thread) to ANSI/ASME B1.20.1 are generally stocked items.

Feedthroughs with parallel threaded process connections, BSPP (parallel gas thread or 'G' thread) to BS2779, DIN ISO 228/1 & JIS B0202; and ISO metric to DIN13, may also be specified. Feedthroughs with parallel mounting threads need an 'O' ring or a gasket seal (not supplied) to prevent leakage at the process connection.

Feedthroughs without process connection threads may be specified for welded mounting and with a fitted flange from a range of styles including ISO-KF and -CF types for the vacuum industry and general applications as well as Triclover® and triclamp types for the food and pharmaceutical industries.

Custom engineered assemblies can be designed and made to meet customers' specific application requirements.

Caps

Plain, hexagonal caps are available for all sizes of feedthrough. Additionally, caps with a threaded extension for a conduit connection are also available. Specifiers may choose **NPT**, **BSPP** (parallel gas thread) or **BSPT** (conical gas thread). These caps can be specified for feedthroughs with 1/4", 1/2" & 3/4" process connections. Cap threads are the same size as the corresponding feedthrough body process connection.

Pressure Equipment Directive (PED)

Spectite® sealed feedthroughs have been classified as 'Piping', satisfying the requirements of the category of Sound Engineering Practice (SEP), according to the European Pressure Equipment Directive (PED) 97/23/EC. The PED does not require the 'CE' symbol to be identified on Pressure Equipment that is categorised as SEP. Caps are marked SPECTITE on one of the hexagon faces.

Feedthrough component materials

Spectite® feedthrough bodies, followers, seats and series EF SS electrodes are manufactured in an austenitic stainless steel UNS S31603, commonly designated 316L. Equivalent grades are: (UK) BS 316 S11; (Germany) W-Nr. 1.4404, DIN CrNiMo 17.13.2; (France) AFNOR Z2 CND 17.12; (Italy) UNI X2 CrNiMo 17.12; (Sweden) SS2353; (USA) AISI 316L; (Japan) JIS SUS 316L. The typical chemical composition for this steel is 0.03% C, 16.0-18.0% Cr, 10-14% Ni, 2.0-3.0% Mo, 0.10% N. Caps are manufactured in 303 stainless steel (W-Nr. 1.4305 / UNS S30300)

When 316L is unsuitable for an application, the 'wetted' metal parts of feedthroughs, that come into contact with a process, can be manufactured in other stainless grades or other materials such as Hastelloy® and Inconel® grades, Monel® R-405 or mild (carbon) steel. There may be minimum manufacturing requirements for feedthroughs in 'exotic' materials.

Insulators in series WF feedthroughs with 1/8" process connections and in series EF feedthroughs are manufactured in high-purity recrystallised Alumina (Aluminium Oxide Al_2O_3).

External, single-bore insulators in series WF feedthroughs are manufactured in aluminous porcelain. Internal insulators are manufactured in a high-performance, engineering plastic for use at temperatures up to +230°C or machineable glass ceramic for use up to +870°C.

Electrical conductors for Series EF feedthroughs are made in grade C101 copper or 316L stainless steel (as above). Nuts and washers on copper conductors are brass, stainless steel conductors have stainless steel nuts and washers.

The lubricant used on feedthrough components is Chlorotrifluoroethylene Polymer (PCTFE). A copy of the Safety Data Sheet is available on request. Spectite® feedthroughs should not be degreased before installation.

Spectite® is a registered trademark of Spectite Ltd.

Kapton® is a registered trademark of E.I. du Pont de Nemours and Company

Viton® is a registered trademark of DuPont Performance Elastomers

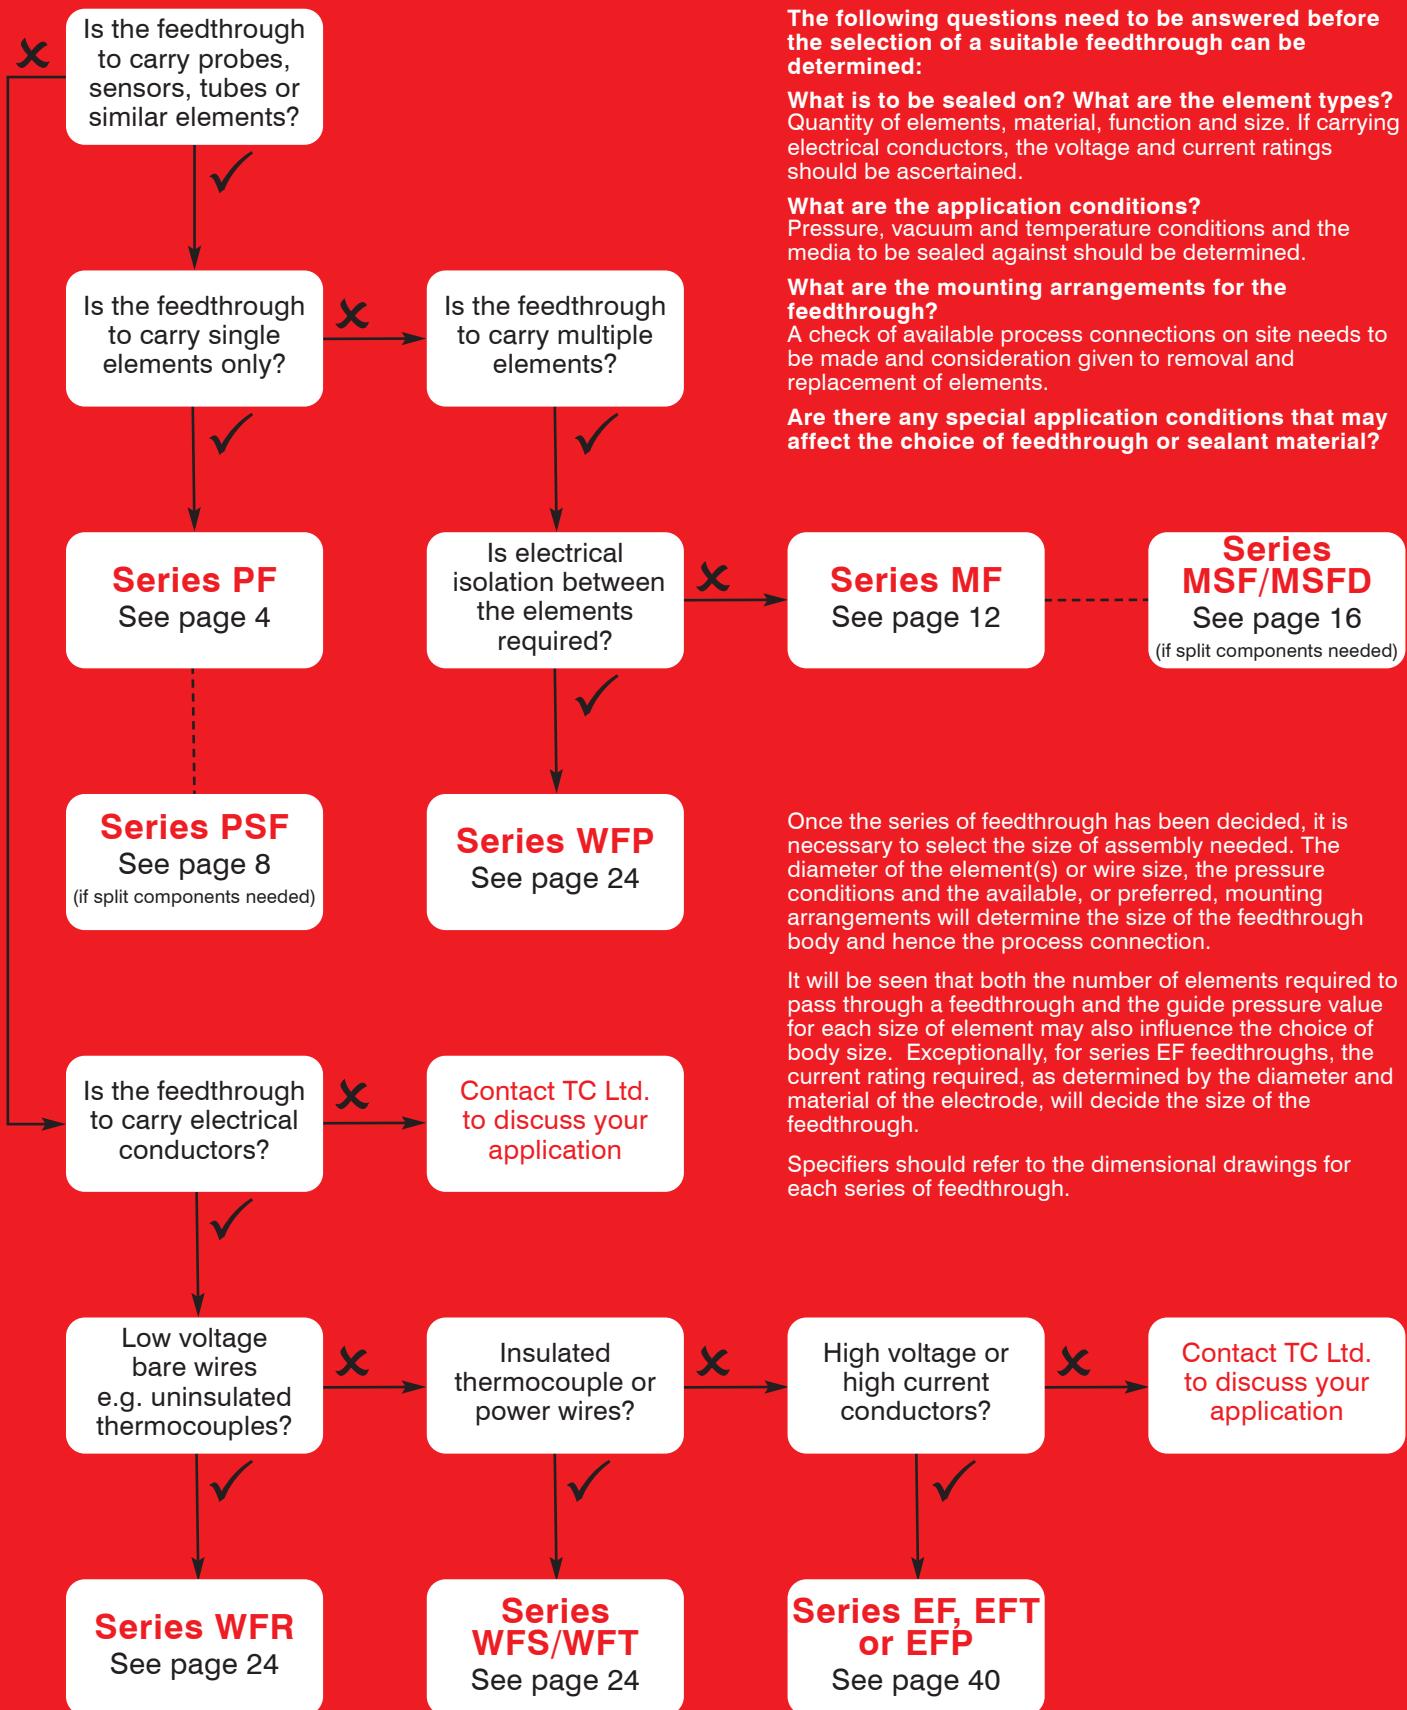
Hastelloy® is a registered trademark of Haynes International, Inc.

Inconel® and Monel® are registered trademarks of the Special Metals Corporation group of companies

Triclover® is a registered trademark of Alfa-Laval AB

Selection Guide

to choosing the correct feedthrough for your application



SPECTITE®

from TC Ltd
PO Box 130
Uxbridge
UB8 2YS
United Kingdom
Tel: +44 (0)1895 252222
Email: info@spectite.co.uk
Web: www.spectite.co.uk